

COBRA_{PLUS}

SPECIFICATIONS

The Cobra Plus maintains efficient AC Emergency Power to operate all emergency lighting fixtures at "full-light" output, after the transfer is complete, providing superior dependability and security to commercial/industrial environments in a small footprint.

POWER RATING

- 2.4 KW - 4.2 KW (or 2,400 Watts - 4,200 Watts) single phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

INPUT

- 120V, 208V, 240V, 277V or 480V input 60Hz

OUTPUT

- 120V, 277V, 480V, 120/240 or 120/277VAC output 60Hz. Stand-by design is ≥99% efficient at 100% linear load

BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

CODES

- UL 924, UL 1778, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

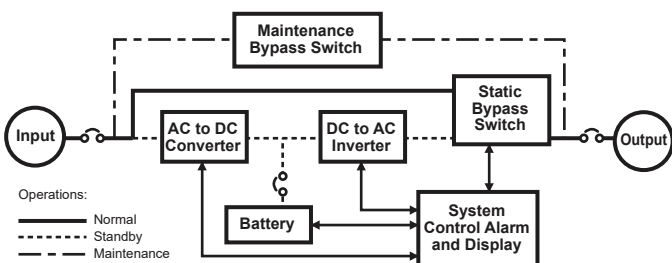

2.4 KW - 4.2 KW

Single Phase

Stand-By
Emergency
Lighting and
Power
Systems



PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and The *Watchdog*® Software to protect system performance and reliability
- Transfer in 16msec - 60msec

DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and The *Watchdog*® Software provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

CABINET

- Space saving small footprint
- Modular design enables flexible installation

INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

SPECIAL APPLICATIONS

- LSL 24/7 offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with The phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available



Job Name: _____

Type: _____

Part #: _____

Notes: _____

Cobra Plus Series	Power Rating	UPS			Weight (lbs)	British Thermal Unit (BTU's)	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		Cabinet Dimensions						Input	Output		
CPLUS	KVA/KW	W	H	D			Sealed, Maintenance free (AGM) lead calcium	<i>Select</i>	<i>Select</i>	Input and output circuit breakers standard	UL924 UL1778 NFPA 101 NFPA 70 NEC
	2.4	26"	44"	26"	700	81.6		120, 208, 240, 277 or 480	120, 277, 480, 120/240 or 120/277		
	2.6	26"	44"	26"	700	88.4					
	3.0	26"	44"	26"	800	102					
	3.4	26"	44"	26"	800	115.6					
	3.8	26"	44"	26"	800	129.2					
4.2	26"	44"	26"	920	142.8						

The Cobra Plus provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation ..."simplicity"...connect the Plus to the emergency circuit(s) and everything is backed up..."reliability"...during a power outage. All lighting connected to the Plus will simply continue to operate at "full light output" once the transfer is complete. The Watchdog© software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time.

We sincerely hope you never experience a real emergency, but if you do, you deserve the **security, safety** and **peace of mind** that the Cobra Plus from **LSL 24/7** ensures.

ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

CPLUS - 4.2 - 277/277 - ECM277/3 OCB/277/3/20/1 - 90

Description of example:

(4.2 KW, 277 Voltage In, 277 Voltage Out, 3 277V Environmental Control Modules, 3 Output 277 Voltage Circuit Breakers at 20amps, 2 pole, 90 minute run time)

CPLUS		VOLTAGE ¹		OPTIONS		TIME ³
FAMILY	POWER RATING	Input/Output	Input/Output			Minutes
	KW			ECM120 - 120V Environmental control module ² /qty		5
	2.4	120/120	240/120-240	ECM277 - 277V Environmental control module ² /qty		10
	2.6	120/277	240/120-277	NOF - Normally OFF output circuit/voltage / qty/pole		15
	3.0	120/480	277/120	NOH - Normally OFF "Hold ON"/voltage/qty/pole		20
	3.4	120/120-240	277/277	OCB - Output circuit breakers / voltage / quantity/amps/pole		25
	3.8	120/120-277	277/480	EPO - Emergency power off		30
	4.2	208/120	277/120-240	RSSP - Remote Indicator Panel		45
		208/277	277/120-277	SNMP - SNMP Card		60
		208/480	480/120	FC - Form C Contacts		90 (Standard)
		208/120-240	480/277	SRB - Seismic rated bracket		120
		208/120-277	480/480	STU1 - Onsite start-up		180
		240/120	480/120-240	IDB - Internal dimmer bypass		240
		240/277	480/120-277	EMB - External maintenance bypass switch		
		240/480		EW - Extended warranty		
				FT - Fast transfer		

NOTES:

1-Consult factory for other voltage requirements. Special voltages may effect the weight, size and number of cabinets.

2-One ECM is used per switching device or circuit.

3-Consult factory for other run times.