

HDC150-90

CUT-OFF LED WALLPACK LUMINAIRE



FULL CUT-OFF, HEAVY-DUTY HOUSING: The HDC150-90 is a Medium 14" Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

WET LOCATION, IP-65 RATED: Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING: The HDC150-90 can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry. Additional Conduit entries Available for Photocells & other Components

120-277V STANDARD TYPE V DISTRIBUTION

OPERATING TEMPERATURE: -20C TO 40C
0C - 40C with EM Pack Option

PRODUCT APPLICATIONS:


- Building
- Entrances
- Walkways Tunnels
- Loading Docks
- Bridges
- Catwalks
- Stairwells

PRODUCT SPECIFICATIONS

NOMINAL WATTAGE	SYSTEM WATTAGE	CCT	LUMENS	EFFICACY	DLC LISTING
12W	12.65	3000K	1,530.00	120.95	PREMIUM
12W	12.65	4000K	1,606.50	127.00	PREMIUM
12W	12.65	5000K	1,686.83	133.35	PREMIUM
24W	23.68	3000K	3,060.00	129.22	PREMIUM
24W	23.68	4000K	3,213.00	135.68	PREMIUM
24W	23.68	5000K	3,373.65	142.47	PREMIUM
36W	34.27	3000K	4,590.00	133.94	PREMIUM
36W	34.27	4000K	4,819.50	140.63	PREMIUM
36W	34.27	5000K	5,060.48	147.66	PREMIUM
48W	46.60	3000K	6,120.00	131.33	PREMIUM
48W	46.60	4000K	6,426.00	137.90	PREMIUM
48W	46.60	5000K	6,747.30	144.79	PREMIUM
60W	56.83	3000K	7,650.00	134.61	PREMIUM
60W	56.83	4000K	8,032.50	141.34	PREMIUM
60W	56.83	5000K	8,434.13	148.41	PREMIUM
72W	67.65	3000K	9,180.00	135.70	PREMIUM
72W	67.65	4000K	9,639.00	142.48	PREMIUM
72W	67.65	5000K	10,121.00	149.61	PREMIUM



PRODUCT DIMENSIONS

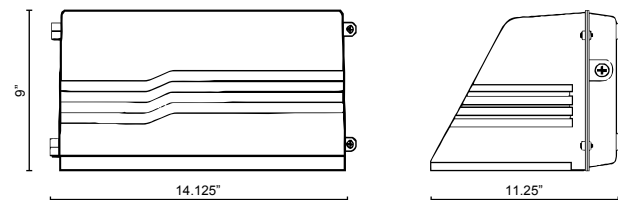

POWER

POWER FACTOR >0.90 - THD <20

ORDERING INFORMATION:

MODEL	WATTAGE	COLOR TEMPERATURE (CCT)	HOUSING COLOR	OPTIONS & ACCESSORIES
HDC150-90				
HDC150-90	12W 12 WATTS 24W 24 WATTS 36W 36 WATTS 48W 48 WATTS 60W 60 WATTS 72W 72 WATTS	27K 2700K - WARM WHITE 30K 3000K - WARM WHITE 35K 3500K - NEUTRAL WHITE 40K 4000K - NEUTRAL WHITE 50K 5000K - COOL WHITE 55K 5500K - DAYLIGHT	BZ BRONZE (STANDARD) WH WHITE BL BLACK SL SILVER CC CUSTOM COLOR	PC1 120V PHOTOCELL PC2 208/277V PHOTOCELL MS MOTION SENSOR MS-DS2 MOTION SENSOR WITH BILEVEL DIMMING D1 0-10V DIMMING D2 STEP DIMMING (120V ONLY) EM EMERGENCY BATTERY PACK V1* 480/347V INPUT (120-277V STANDARD) *NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR