

HDCSHM-UD

ROUND UP/DOWN LED WALLPACK LUMINAIRE



FEATURES

UPLIGHT/DOWNLIGHT, HEAVY-DUTY HOUSING: The HDCSHM is an 18" Half-Moon Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens That Provides a Variety of Uplight and Downlight Options

WET LOCATION, IP-65 RATED

Engineered and Constructed for Exterior Environments

EASY TO INSTALL MOUNTING

4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing

120-277V STANDARD

PRODUCT APPLICATIONS


- Building Entrances
- Walkways
- Tunnels
- Loading Dock
- Bridges
- Catwalks
- Stairwells



PRODUCT SPECIFICATIONS

| NOMINAL WATTAGE | SYSTEM WATTAGE | CCT | LUMENS | EFFICACY |
|-----------------|----------------|-------|----------|----------|
| 12W | 12.65 | 3000K | 1,530.00 | 120.95 |
| 12W | 12.65 | 4000K | 1,606.50 | 127.00 |
| 12W | 12.65 | 5000K | 1,686.83 | 133.35 |
| 24W | 23.68 | 3000K | 2,802.00 | 118.33 |
| 24W | 23.68 | 4000K | 2,942.10 | 124.24 |
| 24W | 23.68 | 5000K | 3,089.21 | 130.46 |
| 36W | 34.27 | 3000K | 4,203.00 | 122.64 |
| 36W | 34.27 | 4000K | 4,413.15 | 128.78 |
| 36W | 34.27 | 5000K | 4,633.81 | 135.21 |
| 48W | 46.60 | 3000K | 5,604.00 | 120.26 |
| 48W | 46.60 | 4000K | 5,884.20 | 126.27 |
| 48W | 46.60 | 5000K | 6,178.41 | 132.58 |
| 60W | 56.83 | 3000K | 7,005.00 | 123.26 |
| 60W | 56.83 | 4000K | 7,355.25 | 129.43 |
| 60W | 56.83 | 5000K | 7,723.01 | 135.90 |

DIMENSIONS

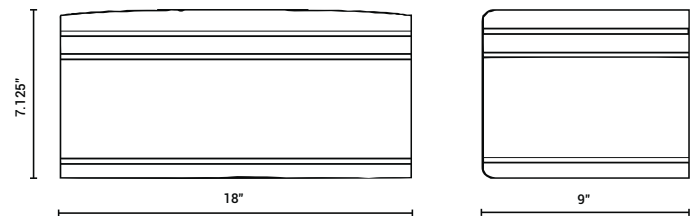

POWER

POWER FACTOR >0.90 - THD <20

ORDERING INFORMATION

| MODEL | WATTAGE UP | WATTAGE DOWN | COLOR TEMPERATURE (CCT) | HOUSING COLOR | OPTIONS & ACCESSORIES |
|-----------|------------|--------------|---------------------------|-----------------|--|
| HDCSHM-UD | 12W | | | | |
| | | 12W | 27K 2700K - WARM WHITE | BZ BRONZE | MS MOTION SENSOR |
| | | 24W | 30K 3000K - WARM WHITE | (STANDARD) WH | D1 0-10V DIMMING |
| | | 36W | 35K 3500K - NEUTRAL WHITE | WHITE | D2 STEP DIMMING |
| | | 48W | 40K 4000K - NEUTRAL WHITE | BL BLACK | EM EMERGENCY BATTERY PACK |
| | | 60W | 50K 5000K - COOL WHITE | SL SILVER | V1* 480/347V INPUT (120-277V STANDARD) |
| | | | 55K 5500K - DAYLIGHT | CC CUSTOM COLOR | |

*NOT AVAILABLE WITH A PHOTOCELL OR MOTION SENSOR