

HDCSHM


18" Half-Moon LED Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

Finishes: Bronze (BRZ), White (WH), Black (BLK), Silver (SL) and Custom Colors (CC)

Dimensions: 118.00"L x 7.125"H x 9.00"E

Notes/ Certifications/Warranty

- Universal Voltage- 120-277V Standard
- Power Factor >0.90 - THD <20
- Type IV Distribution
- 4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing
- Buy American Act Compliant
- Dark Sky
- DLC
- cETLus Listed for Wet Locations
- IP-65 Rated
- Standard Operating Temperature -20°C to 40°C. 0°C -40°C with EM Pack Option
- 5 Year Warranty

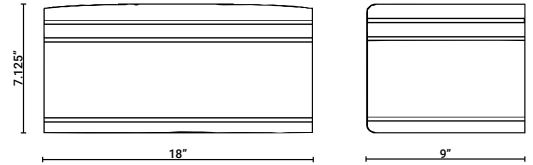

Nominal Wattage	System Wattage	CCT	Lumens	Efficacy	DLC 5.0V Listing
12W	12.72	3000K	1457.50	114.58	NONE
12W	12.72	4000K	1530.38	120.31	NONE
12W	12.72	5000K	1606.89	126.33	STANDARD
24W	23.02	3000K	2915.00	126.63	STANDARD
24W	23.02	4000K	3060.75	132.96	STANDARD
24W	23.02	5000K	3213.79	139.61	STANDARD
36W	34.27	3000K	4372.50	127.59	STANDARD
36W	34.27	4000K	4591.12	133.97	STANDARD
36W	34.27	5000K	4820.68	140.67	STANDARD
48W	46.60	3000K	5588.65	119.93	NONE
48W	46.60	4000K	5756.31	123.53	NONE
48W	46.60	5000K	5929.00	127.23	NONE
60W	56.83	3000K	6719.78	118.24	NONE
60W	56.83	4000K	7055.77	124.16	NONE
60W	56.83	5000K	7408.56	130.36	STANDARD

HDCSHM	WATTAGE	CCT	FINISH	OPTIONS & ACCESSORIES
HDCSHM	12W 24W 36W 48W 60W	27K 30K 35K 40K 50K 57K	BRZ-Bronze <i>(Standard)</i> WH-White BLK- Black SL- Silver CC- Custom Color	MS-Motion Sensor MS-D2- Motion Sensor with Bi-level Dimming D1- 0-10V Dimming D2- Step Dimming (120V Only) EM-Emergency Battery Pack V1*-480/347V INPUT (120-277V Standard) <small>*NOT AVAILABLE WITH EM OR MOTION SENSOR</small>

When specifying options, please check with your Lumencia rep for availability and lead time. Please note any finish other than Bronze (BRZ) is non-cancelable and nonreturnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable.