

Job Name: _____

Type: _____

Part #: _____

Notes: _____

HFE Series


RESIDENTIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting Hardware Included




HFE101

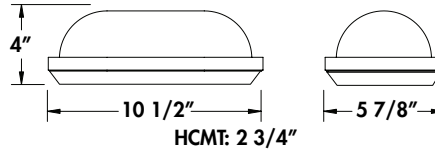


HFE102

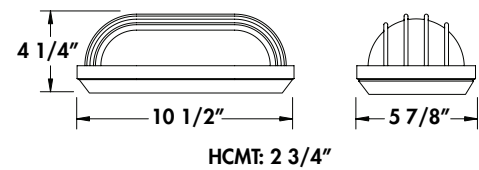

HFE103

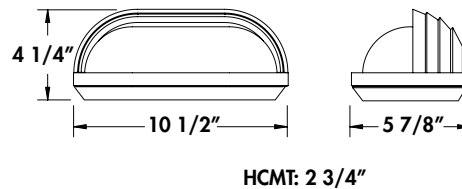

HFE104

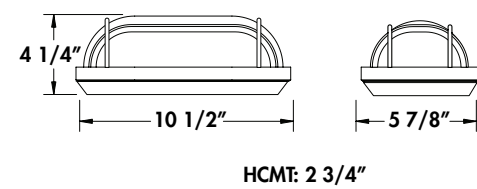

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE101 HFE102 HFE103 HFE104	INCANDESCENT 120V INCANDESCENT, MEDIUM BASE, 120V I60-1 X 60W Max	W-White B- Black	POLYCARBONATE F-Frosted	S-Security Motion Sensor & Photocell Combo. 120V only LED LAMP, 3 YEAR WARRANTY DIMMABLE LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K

HFE111 & HFE113


COMMERCIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Aluminum Base
- Wall Mount Only
- Mounting Hardware Included



HFE111

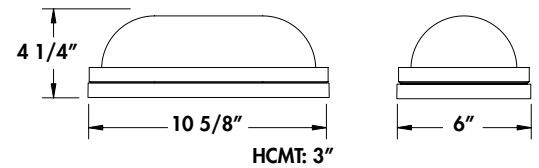

HFE113

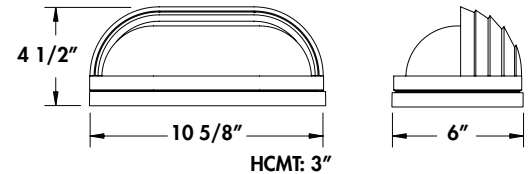

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE111 HFE113	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800: - 13W, 80 CRI 88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	P-Photocell 120V only. See page 18 for details. S-Security Motion Sensor & Photocell Combo. 120V only. See page 16.
	MULTI-VOLT 120-277V LED: MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L900: - 11.3W Power Input CRI 74 (TYP) 80 Lumens Per Watt** C-912lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	S-Security Motion Sensor & Photocell Combo. See page 16.

HFE112 & HFE114


COMMERCIAL EUROSTYLE

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Aluminum Base
- Wall Mount Only
- Mounting Hardware Included



HE114

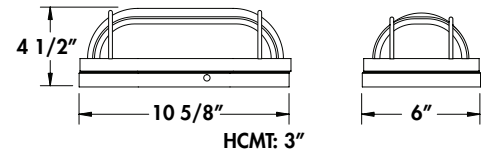

HE112

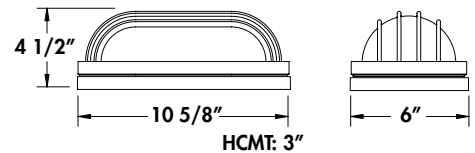

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE111 HFE113	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800: - 13W, 80 CRI 88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	P-Photocell 120V only. See page 18 for details. S-Security Motion Sensor & Photocell Combo. 120V only. See page 16.
	MULTI-VOLT 120-277V LED: MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L900: - 11.3W Power Input CRI 74 (TYP) 80 Lumens Per Watt** C-912lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	S-Security Motion Sensor & Photocell Combo. See page 16.