
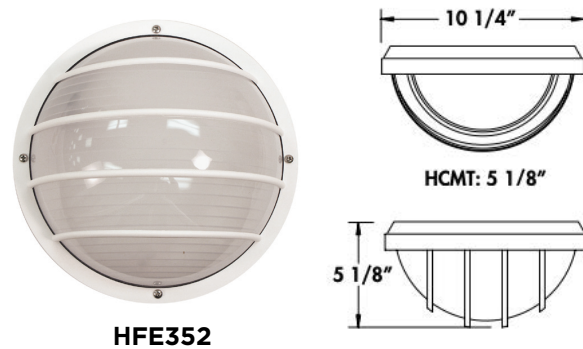


HFE35 Series

RESIDENTIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting

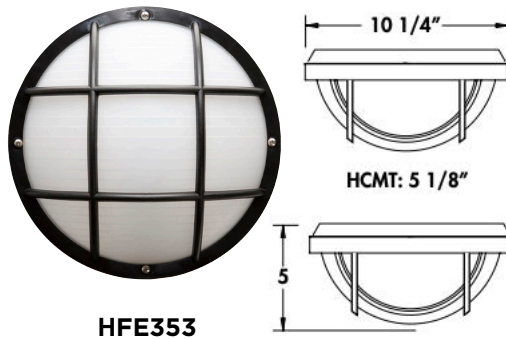

ORDERING GUIDE:

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE351 HFE352 HFE353	INCANDESCENT 120V:INCANDESCENT MEDIUM BASE, 120V I75-1 X 75W Max	W-White B- Black	POLYCARBONATE F-Frosted	S-Security Motion Sensor & Photocell Combo. 120V only. See page 16. LED LAMP, 3 YEAR WARRANTY DIMMABLE LWE-A19/E26, 80CRI, 3000K LCE-A19/E26, 80CRI, 4000K

HFE361 Series


RESIDENTIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting



DIMENSIONS:

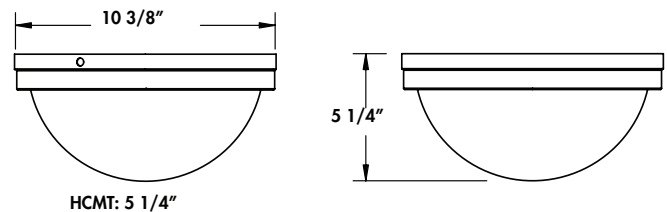

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE361				
HFE361	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W, 80 CRI >88 Lumens Per Watt** LE1200 - 14W, 80 CRI >102 Lumens Per Watt** LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W-1140lm 3000K C-1280lm 4000K W-1430lm 3000K C-1500lm 4000K W-1950lm 3000K C-2130lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted P- Photocell 120V only. See page 18 for details. S- Security Motion Sensor & Photocell Combo. 120V only. See page 14.
	MULTI-VOLT 120-277V LED: MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W, 80 CRI CRI 74 (TYP)	W-1704lm 3000K C-1824lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted S- Security Motion Sensor & Photocell Combo. See page 16.

HFE362 Series



COMMERCIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting



DIMENSIONS:

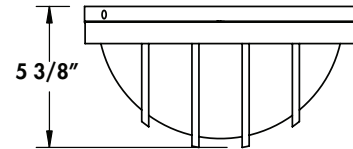

HCMT: 5 1/4"

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE362				
HFE362	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W, 80 CRI >88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K LE1200 - 14W, 80 CRI >102 Lumens Per Watt** W-1430lm 3000K C-1500lm 4000K LE1800 - 22W, 80 CRI >88 Lumens Per Watt** W-1950lm 3000K C-2130lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	P- Photocell 120V only. See page 18 for details. S- Security Motion Sensor & Photocell Combo. 120V only. See page 14.
	MULTI-VOLT 120-277V LED: MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W, 80 CRI CRI 74 (TYP) W-1704lm 3000K C-1824lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted	S- Security Motion Sensor & Photocell Combo. See page 16.

HFE363 Series



COMMERCIAL EUROSTYLE

FEATURES:

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting



DIMENSIONS:

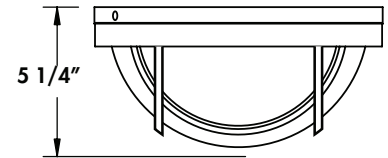

HCMT: 5 1/4"

ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFE363				
HFE363	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W, 80 CRI >88 Lumens Per Watt** LE1200 - 14W, 80 CRI >102 Lumens Per Watt** LE1800 - 22W, 80 CRI >88 Lumens Per Watt**	W-1140lm 3000K C-1280lm 4000K W-1430lm 3000K C-1500lm 4000K W-1950lm 3000K C-2130lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted P- Photocell 120V only. See page 18 for details. S- Security Motion Sensor & Photocell Combo. 120V only. See page 14. EB- Emergency Backup See page 123.
	MULTI-VOLT 120-277V LED: MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W, 80 CRI CRI 74 (TYP)	W-1704lm 3000K C-1824lm 4000K	W-White B- Black	POLYCARBONATE F-Frosted S-Security Motion Sensor & Photocell Combo. See page 16.