

HFL Series

LUNAR BULKHEAD

FEATURES:


- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Polycarbonate Lens & Base
- Wall Mount
- Mounting




FIXTURES WITH
EMERGENCY BACKUP
LED LIGHT OPTION



HFL372

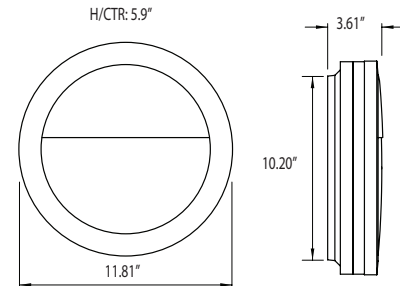

HFL371



ORDERING INFORMATION:

MODEL	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
HFL371 HFL372	DEDICATED 120V LED: EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE1200 - 14W, 80 CRI >102 Lumens Per Watt** LE1800 - 22W, 80 CRI >88 Lumens Per Watt** LE2600 - 32W, 80 CRI >84 Lumens Per Watt** W-1430lm 3000K C-1500lm 4000K W-1950lm 3000K C-2130lm 4000K W-2700lm 3000K C-2750lm 4000K	W-White B- Black	POLYCARBONATE W-White	S-Security Motion Sensor & Photocell Combo. 120V only. See page 16. Not compatible with LE2600 model. EB-Emergency Backup See page 123.
	MULTI-VOLT 120-277V LED: MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W, 80 CRI CRI 74 (TYP) W-1704lm 3000K C-1824lm 4000K	W-White B- Black	POLYCARBONATE W-White	S-Security Motion Sensor & Photocell Combo. See page 16. EB-Emergency Backup See page 123.