

HPT01

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 140 lm/W, Dimmable Post Top

APPLICATIONS: Premium outdoor luminaire suitable for entrances, building exteriors, parks, and pedestrian walkways.

CONSTRUCTION: Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL: Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) and 3-Wattage models. Lumen Output: 10000 to 21000 lumens, Efficacy: 140 lm/W. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING: Includes 3-inch Slip-Fit Pole Mounting base.


OPTICS: Anti-UV Clear Polycarbonate IES/ NEMA Type 5 Lens.

LISTINGS: DLC Premium listed. UL certified to meet US and Canadian standards. Wet Location Rated. FCC and RoHS compliant.

WARRANTY: 5 year exclusive limited warranty.



Tunable 150W Max Models

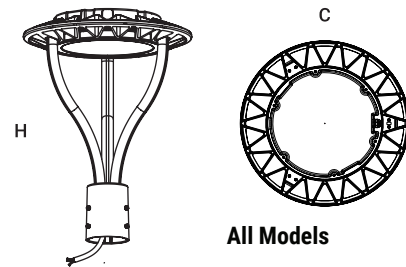

All Models

ø14.23"C x 9.23"H

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 3-Wattages (150W Max)

Power Factor: >0.9

Total Harmonic Distortion (THD): <10%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 4200 to 21000

Lumens Per Watt: 140 lm/W

Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K) **Dimmable:** 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours

ORDERING INFORMATION

| Model | Wattage | Voltage | Current | Lumens | Efficacy | CCT | Dimming | Color | Dimensions |
|----------------|-------------------------|----------|---|-------------------------|----------|-----------------------------|---------|-------|-------------------|
| HPT01-150W-H-T | (70W, 100W, 150W) | 120-277V | 0.64A@120V, 0.28A@277V 0.92A@120V, 0.40A@277V 1.38A@120V, 0.60A@277V | 10000 14000 21000 | 140 lm/W | (3000K, 4000K, 5000K) | 0-10V | Black | ø14.23"C x 9.23"H |