

HRK-LED56-BW

5/6" LED Trims

STANDARD



FEATURES

- Available in 2700k, 3000k, 3500k, 4000k, and 5000k color temperatures.¹
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 50,000 hours of operation.²
- Provides up to 1,200 nominal lumens.
- BRK-LED56-BW = 12 nominal watts. HRK-LED56-16BW = 16 nominal watts.
- Color rendering index (R_a) > 80.³
- 120 (50-60Hz) AC voltage is standard.
- Power factor > 0.90.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- Compatible with insulated, non-insulated, and air-tight ceilings (Type IC).
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL9ICLED series housings.
- This device is not intended for use with emergency exits.


WARRANTY & LISTINGS

- cETLus listed for wet locations.
- Title 24 compliant (HRK-LED56-16BW-27-ECO-C only).
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.


¹ Contact factory for other color temperatures and lumen packages.

² L_{70} hours are IES TM-21-11 calculated hours.

³ BRK-LED56-16BW-27-ECO-C = CRI ≥ 90.

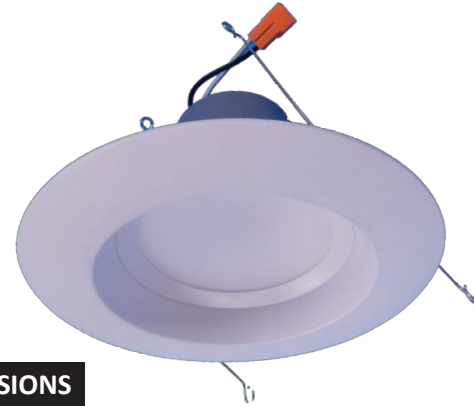

DIMENSIONS

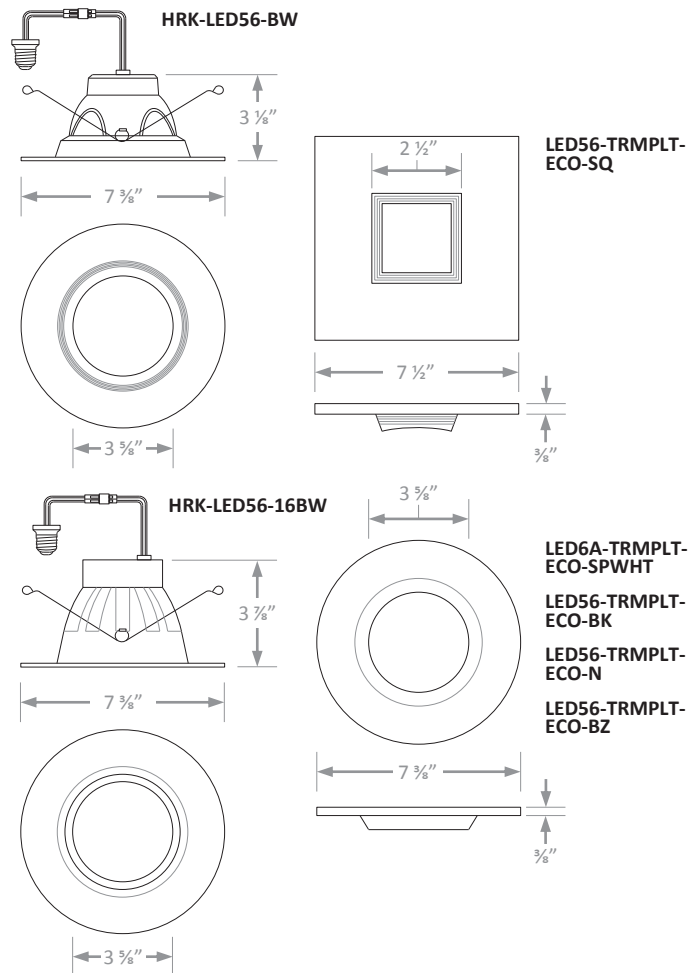

ORDERING INFORMATION

Example: HRK-LED56-BW-5-ECO

Series	Trim Type	Color Temperature (lumen output)	Accessories (Order Separately)
HRK-LED56	BW Baffle	27-ECO 2700K (900 lm)	LED56-TRMPLT-ECO-SQ Square snap trim
		3-ECO 3000K (960 lm)	LED6A-TRMPLT-ECO-SPWHT Specular white snap trim
		35-ECO 3500K (980 lm)	LED56-TRMPLT-ECO-BK Black snap trim
		4-ECO 4000K (1,000 lm)	LED56-TRMPLT-ECO-N Nickle snap trim
		5-ECO 5000K (1,060 lm)	LED56-TRMPLT-ECO-BZ Bronze snap trim
		3-ECO-C 3000K (780 lm)	
HRK-LED56	16BW 16 watt baffle	27-ECO-C 2700K (1,200 lm)	