

HTP

3-CCT LED Post Top Lantern

3-CCTSelect (3000K, 4000K, 5000K)

FEATURES

Lumen Output	3150 to 10500 lumens
Efficacy	105 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3000K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS: Premium outdoor luminaire suitable for entrances, building exteriors, parks, and pedestrian walkways.

CONSTRUCTION: Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL: Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K), Single Wattage, and Tunable 3-Wattage models. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING: Includes 3 inch Slip-Fit Pole mounting base.

OPTICS: Anti-UV Frosted Glass IES /NEMA Type V Lens standard.

CONTROLS: Includes NEMA 3-Pin Photocell Sensor Cap.

LISTINGS: DLC listed. UL certified to meet US and Canadian standards. FCC an RoHS compliant.


WARRANTY: 5 year exclusive limited warranty.




Photocell Sensor Cap



DIMENSIONS

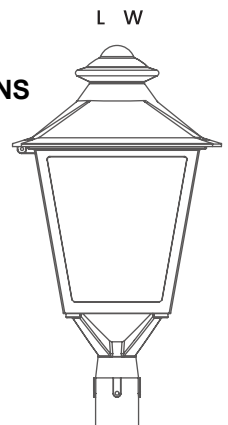

TUNABLE CORRELATED COLOR TEMPERATURES

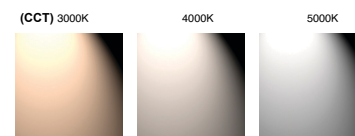

30W Models
13.80"L x 13.80"W x 24.92"H

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
HTP350-W30	30W	100-277V	0.28A@120V, 0.12A@277V	3150	105 lm/W	(3000K, 4000K, 5000K)	0-10V	Black	13.80"L x 13.80"W x 24.92"H
HTP350-W100-C3	(30W, 60W, 100W)	100-277V	0.28A@120V, 0.12A@277V 0.55A@120V, 0.24A@277V 0.92A@120V, 0.40A@277V	3150 6300 10500	105 lm/W	(3000K, 4000K, 5000K)	0-10V	Black	13.80"L x 13.80"W x 24.92"H



Job Name: _____

Type: _____

Part #: _____

Notes: _____

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 30W, 3-Wattages (100W Max)

Power Factor: >0.9

Total Harmonic Distortion (THD): <15%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 3150 to 10500

Lumens Per Watt: 105 lm/W

Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K) **Dimmable:** 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours