

HVF2 SERIES

NSF/ANSI2 FOOD ZONE

LINEAR HIGHBAY

: 95 HI F9G

- BYk.; Yfa JWXU'I J''[[\ hcdHjcb
- BC'J Udcf'Hj[\ h7`jdgz: UWcfmGYUYX
- <J[\ 'dYfZfa UbW'@8`@ L9CB`GA8
- Lumen output 12,000 to 45,000 lumens
- Efficacy Up To 150lm/W
- LED Lifespan> 50,000 hours (Ta=30°C @L70).
- CCT: 3000K 4000K 5000K 6000K (5000K standard). RGB, Germicidal options available (consult factory).
- Aluminum alloy (AL6063) housing with white epoxy powder coat finish standard (Unpainted AL6063 available)
- 0-10V dimming. 80W-200W uses single driver, 300W uses double drivers.
- Consult factory for custom cord and wiring options. Fixture comes standard with 3ft whip and IP69K waterproof connector.
- Polycarbonate lens - safe for food processing applications.
- External PIR sensor (IP65) and motion sensor options available.

A97<5B=75@

- Robust AL6063 housing withstands harsh industrial environments.
- Stainless Steel suspended mounting cable and surface mounting brackets options available.
- Standard with mounting loops for chain hanging.
- Achieves -40C-55C ambient rating. Good for cold storage and high heat applications.

9@7HF=75@

- 100-277V Standard. 200-480V available
- CCT: 3000K, 4000K, 5000K, 6000K ,RGB Germicidal
- Up to 150lm/W


7CBHFC@CDHCBG

- Unit mounted dipswitches - CCT and wattage tunable
- Phone app/BlueTooth - TUYA: CCT and dimmable
- ZIGBEE - WiFi Gateway (contact factory)
- Rockwell PLC Control (contact factory)



With Germicidal Light Option

Wattage & Color Changing High Bay

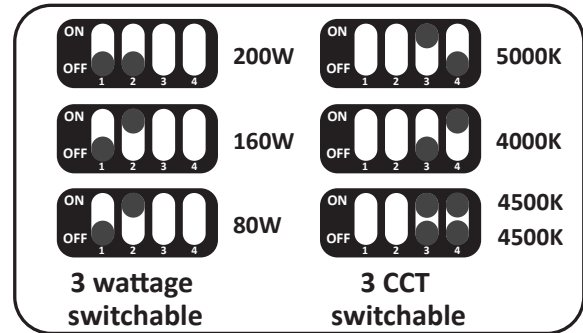

WARRANTY AND LISTING

- UL 1598-2008
- DLC premium
- IP69K rated
- NSF/ANSI 2 (approved for food zone non-contact, splash zone, and non-food zone)
- 1500psi hosedown
- -30°C to 45°C Cold Storage/High Temp (contact factory for 65°C)
- 5 year warranty @ 24 hour operation



ORDERING INFORMATION

SERIES	WATTAGE	VOLTAGE	CCT	CRI	OPTIC	DRIVER	ACCESSORIES
HVF2	8 = 80W	LV = 120-277V	S = 3000K	7 = 70	15°	D* = Dimmable	CL** = Cable Length
	12 = 120W	HV = 200-480V	I = 4000K	8 = 80	25°	ND = Non Dimmable	MS = Microwave Sensor 60C rated
	16 = 160W		C = 5000K	85 = 85	40°		PIR***= Passive Infrared Sensor 35C rated
	20 = 200W		K = 6000K		60°		DS = Dip-switch (Tunable)
	30 = 300W		N = 4K,45K,5K		90°		MS-T = Bluetooth Tuya phone app
	WT = 80W,160W,200W		Tunable		120°		AH= Aluminum Housing no paint
	Tunable		C = CUSTOM		30° x 15°		PM = Pendent mount 3/4" Conduit Hub
	WT-1 = 300,250,200		R = Red		49° x 21°		SM= Surface mount (no loops)
	Tunable		G = Green		136° x 78°		ZT = ZIGBEE
			B = Blue				RP = Rockwell PLC Control
							BT = Bluetooth (Phone Tuya App)


*Adds dimming wire to top **Specify cable length. ***Only IP65

NOTE: ORDER REMOTE OPTION FOR PIRAND MICROWAVE SENSORS TO CHANGE SETTINGS

TECHNICAL PARAMETERS

Power	80W	120W	160W	200W	250W	300W
Input Voltage	AC100-277V/AC200-480V, 50/60HZ					
Power Factor	0.95					
Working Temperature	-30°C_45°C					
Lumen Efficacy	150lm/w					
Lumen	12000 lm	18000 lm	24000 lm	30000 lm	37,500	45000 lm
Color Temperature	3000K-6500K					
Beam Angle	15°/25°/40°/60°/90°/120°/30°X15°/49°X21°/136°X78°					
CRI	Ra>70/Ra>80					
Housing Color	White Aluminum					
Lifespan	50.000 hours@L70					
Fixture Dimension	448*250*69mm	556*250*69mm		810*250*69mm		


BEAM ANGLE

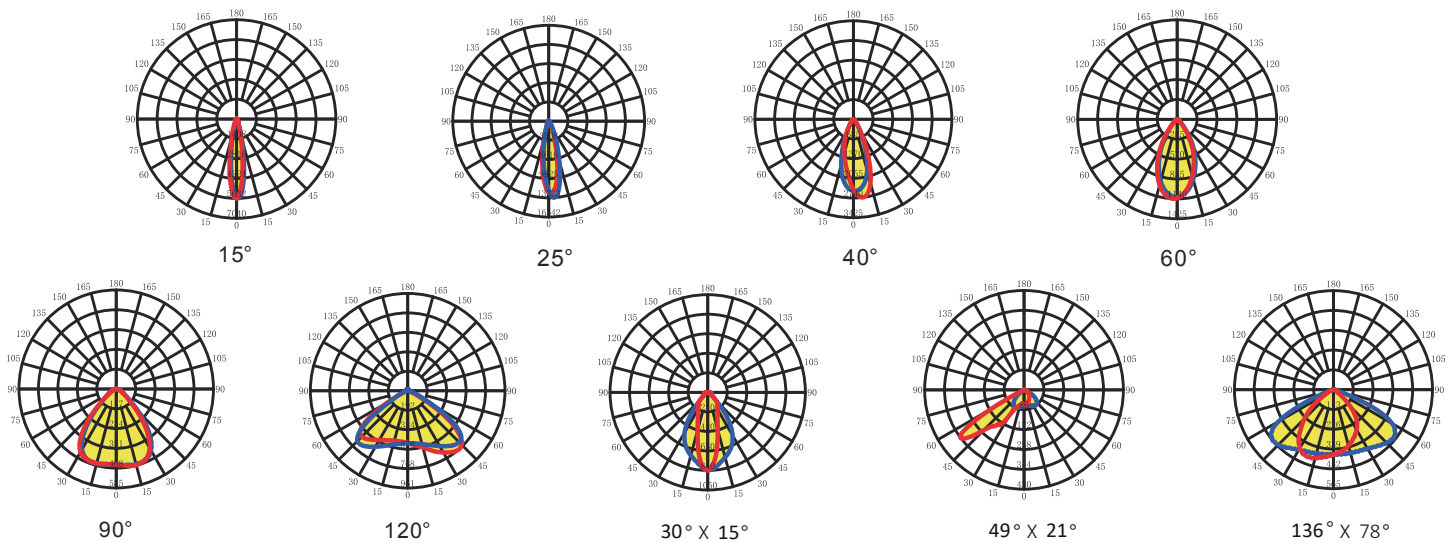

OPTIONS:



Stainless Steel Surface mount bracket with power wire, no dimming



Field Interchangeable Lenses



HANDHELD CONTROLLER

HC-1 (PIR)
HC-2 (Microwave)



3/4" Conduit-Mounted (VICOHRSN-PSH-PRM)



Chain/hook mounting kit
CHMK-1




Linear Red Enhanced Lighting System provides a more uniform and continuous light pattern free of dark spots and shadows. Birds are less likely to be spooked or provoked by movement outside of the systems. As a result, these birds are noticeably less-stressed and calmer. This lighting system reduces electricity costs, decreases labor and maintenance costs, and increase flock performance.

Linear Red Enhanced Lighting has a deep red saturated light output with an added blue and green spectrum, benefiting the vision of the animals. The enhanced red spectrum is the only spectrum which stimulates a hen's hypothalamic and pineal oscillators, helping maintain circadian rhythms and promoting sexual maturity. It also stimulates the release of two reproduction regulating hormones essential for daily egg production.

SWINE LIGHTING SYSTEMS

These particular lighting systems are designed to provide exceptional light quality for both the swine herds and the humans caring for them. They are made with species-specific dim-to-red-calm technology and are suitable to be used in sow barns, gestation buildings, nurseries, gilt development units, and finishing facilities. Our technology allows the lighting fixture to fully dim red, which swine perceive as darkness. This allows the red light to be used as a "service light," allowing workers to access the facility without disturbing or interrupting the sleep cycles of the animal.





PRODUCTIVITY ENHANCEMENT




Under full spectrum plus dim to 0.2% technology, birds are calmer, less prone to run, not as jumpy, and consequently put more energy into growing.


By having more red spectrum during brooding, LED lights promote early growth. Research tests and on-farm testing have both shown immediate changes in bird behavior and improved feed conversion ratios when the lights are dimmed to the lower levels of blue enhanced spectrum.

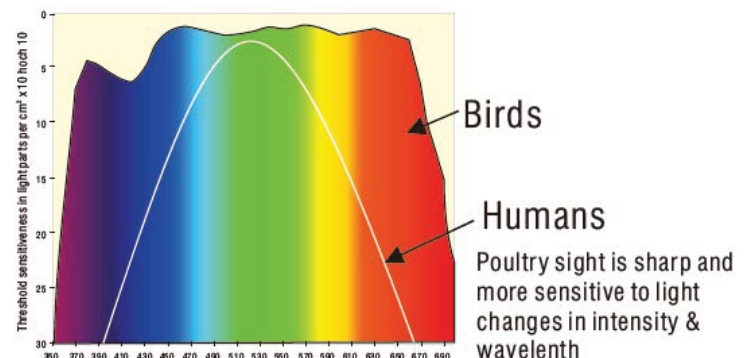

Full spectrum at 100%



Full spectrum at 50%



Full spectrum at 10%