Job Name:

Type:

Part #:


Notes:


HZE1.3


1.3" Spec-grade Wall Mount Architectural LED Linear Lighting

This 1.3" Series is available in a wall mount design, with a sleek low-profile sensibility optimal for architectural lighting applications, ideal for corridors, stairwells, and more. These timeless, streamlined forms blend well with contemporary decors and modern workplaces. It is available in 2ft, 3ft, 4ft and 8ft, simply provide wide, powerful lighting to any atmosphere with continuous runs. It can provide smooth uplight and downlight, allowing for wider spacing between fixtures and better ceiling light uniformity.




Diffuser


Louver



Drop Lens

Features:

- 90+ CRI
- 2 lighting distributions by DIP switch
- CCT adjustable and wattage selectable
- 0-10V dimming, dim to 10% or 1% options
- Available in diffuser, louver and drop lens Individual units or continuous runs
- 2ft,3ft, 4ft and 8ft lengths

PERFORMANCE

Lens	Length	Wattage Selectable	25% UP/75%DOWN		100%DOWN		CCT Adjustable
			Efficacy	Lumen Output	Efficacy	Lumen Output	
Diffuser	2'	20W/15W/10W	850lm/ft	Up to 1700LM	800m/ft	Up to 1600LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 2600LM		Up to 2400LM	
	4'	40W/30W/20W		Up to 3400LM		Up to 3200LM	
	8'	80W/60W/40W		Up to 6800LM		Up to 6400LM	
Louver	2'	20W/15W/10W	750lm/ft	Up to 1500LM	700lm/ft	Up to 1400LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 2300LM		Up to 2100LM	
	4'	40W/30W/20W		Up to 3000LM		Up to 2800LM	
	8'	80W/60W/40W		Up to 6000LM		Up to 5600LM	
Drop Lens	2'	20W/15W/10W	1000lm/ft	Up to 2000LM	950lm/ft	Up to 1900LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 3000LM		Up to 2900LM	
	4'	40W/30W/20W		Up to 4000LM		Up to 3800LM	
	8'	80W/60W/40W		Up to 8000LM		Up to 7600LM	

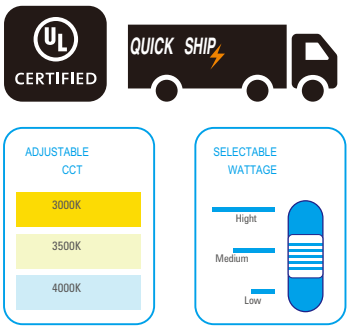

Note: Lumens are subjuect to maximum wattage,4000K with white finish only.
Lumen output may vary ± 5% base on different CCT and wattage. Actual wattage may vary ± 5%.

PRODUCT ORDERING GUIDE

Example: HZE1.3-4S-WH-40W-D10-90TW-A-DF (Wall)

HZE1.3 - - - - - 90 - TW - A - DF - (Wall)

Product Series	Length	Finish	Wattage	0-10V Dim	CRI	CCT	Lighting Distribution	Down Lens
HZE1.3 Linear	**2S** QuickShip 2 Feet Slim	**WH** QuickShip White	**20W** QuickShip 20W/15W/10W Selectable for 2ft	**D10** QuickShip 110-277V AC Dims to 10% *Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.*	**90** QuickShip 90+ CRI (Standard)	**TW** QuickShip CCT adjustable 3000K/3500K/ 4000K	**A** QuickShip 100% down or 25%up/75% down by visible Dip switch	**DF** QuickShip Diffuser
	3S Make to Order 3 Feet Slim*	**BL** QuickShip Black	**30W** 30W/23W/15W Selectable for 3ft					**LV** QuickShip Louver
	4S QuickShip 4 Feet Slim	**CM** Make to Order Custom*	**40W** QuickShip 40W/30W/20W Selectable for 4ft	**D01** QuickShip 110-277V AC Dim to 1%				**DL** QuickShip Drop Lens
	8S QuickShip 8 Feet Slim		**80W** QuickShip 80W/60W/40W Selectable for 8ft					

Just to remark the mounting. Don't show in product label.

2026.10

Office: 267-982-2661
www.High5LED.com

Specifications subject to change without prior notice.
@2026 High5LED. ALL RIGHTS RESERVED

HIGH5LED

Job Name:

Type:


Part #:

Notes:

OPTIONAL ACCESSORY

Non-lit Joiner

SJ QuickShip
Straight Line Joiner
(Optional 40° rolling lens)





Mounting & Optional Function

SMK QuickShip
Surface Mounting Kits



EME QuickShip
Emergency Function
(Only external 16w or 25w LED emergency driver with standard indicator available and need field-installed.)



CUSTOM LINE OR SHAPE ORDERING GUIDE

Example: HZES-W-C18-WH-D10

HZES-W-C__ - __ - __

SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET)

HZES-W-C__ Individual 6ft/ up to 8ft Continuous Run Section (Enter length in product code above, ex. C18) QuickShip



(C)
Continuous Run

Finish

WH QuickShip
White

BL QuickShip
Black

CM Make to Order
Custom*


0-10V Dim

D10 QuickShip
110-277V AC
Dims to 10%
Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.

D01 QuickShip
110-277V AC
Dim to 1%

* Make to Order means additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information. Damp rated for ambient operating temperature of -20°C to +40°C (-4° to+104°F)

DIMENSIONS

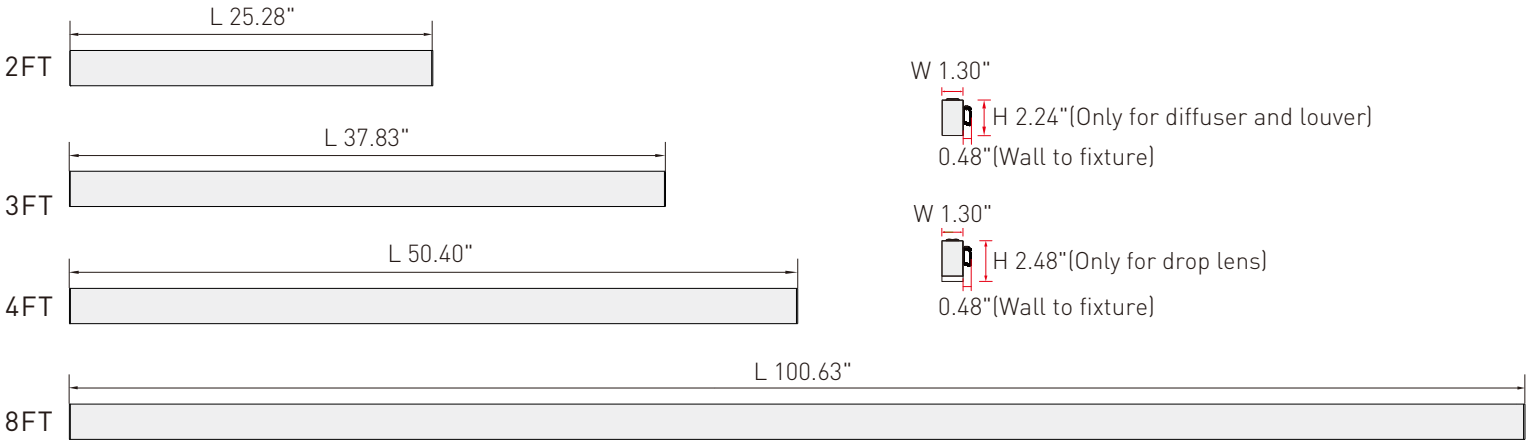

Photometrics and Install Directions Available on Request

2026.10

Specifications subject to change without prior notice.
@2026 High5LED. ALL RIGHTS RESERVED