HIGH5LED

Job Name:

Type:


Part #:

Notes:

HZE1.3S

Surface Spec-grade
Architectural LED Linear Lighting

1.3" linear surface lighting is a unique linear series that brings any space to the center stage. These timeless, streamlined forms blend well with contemporary decors and modern workplaces. These linear luminaries is available in 2ft, 3ft, 4ft and 8ft, simply provide wide, powerful lighting to any atmosphere with continuous runs. Unleash lighting design flexibility with different shapes and patterns, it adds fun factor into each room.

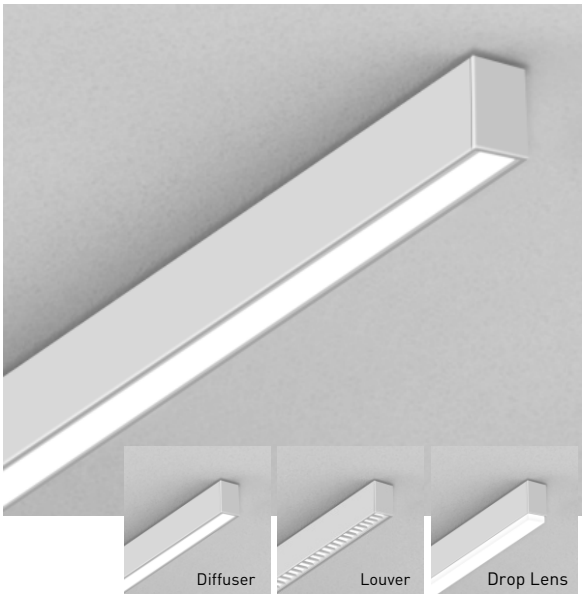

Features:
- 90+ CRI
- CCT adjustable and wattage selectable
- Available in diffuser, louver and drop lens
- Individual units or continuous runs
- 0-10V dimming, dim to 10% or 1% options
- Custom pattern with optional Line, L, +, T, Y, V joiners
- 2ft, 3ft, 4ft and 8ft lengths



PERFORMANCE

Lens	Length	Wattage Selectable	100%DOWN		CCT Adjustable
			Efficacy	Lumen Output	
Diffuser	2'	20W/15W/10W	800m/ft	Up to 1600LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 2400LM	
	4'	40W/30W/20W		Up to 3200LM	
	8'	80W/60W/40W		Up to 6400LM	
Louver	2'	20W/15W/10W	700lm/ft	Up to 1400LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 2100LM	
	4'	40W/30W/20W		Up to 2800LM	
	8'	80W/60W/40W		Up to 5600LM	
Drop Lens	2'	20W/15W/10W	950lm/ft	Up to 1900LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 2900LM	
	4'	40W/30W/20W		Up to 3800LM	
	8'	80W/60W/40W		Up to 7600LM	

Note:Lumens are subjuect to maximum wattage,4000K with white finish only.

Lumen output may vary ± 5% base on different CCT and wattage. Actual wattage may vary ± 5%.

PRODUCT ORDERING GUIDE

Example: HZE1.3S-WH-40W-D10-90TW-A-DF (Surface)

HZE1.3S - - - - - 90 - TW - A - DF - Surface

Product Series
HZE1.3S
Linear

Length
- 2S QuickShip — 2 Feet Slim
- 3S Make to Order — 3 Feet Slim*
- 4S QuickShip — 4 Feet Slim
- 8S QuickShip — 8 Feet Slim

Finish
- WH QuickShip — White
- BL QuickShip — Black
- CM Make to Order — Custom *

Wattage
- 20W QuickShip — 20W/15W/10W Selectable for 2ft
- 30W — 30W/23W/15W Selectable for 3ft
- 40W QuickShip — 40W/30W/20W Selectable for 4ft
- 80W QuickShip — 80W/60W/40W Selectable for 8ft

0-10V Dim
- D10 QuickShip — 110-277V AC Dims to 10% *Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.*
- D01 QuickShip — 110-277V AC Dim to 1%

CRI
- 90 QuickShip — 90+ CRI (Standard)

CCT
- TW QuickShip — CCT adjustable 3000K/3500K/4000K

Lighting Distribution
- A QuickShip — 100% down or 25%up/75% down by visible Dip switch

Down Lens
- DF QuickShip — Diffuser
- LV QuickShip — Louver
- DL QuickShip — Drop Lens

Just to remark the mounting. Don't show in product label.

2026.10

Office: 267-982-2661
www.High5LED.com

Specifications subject to change without prior notice.
@2026 High5LED. ALL RIGHTS RESERVED

Job Name:

Type:

Part #:


Notes:

OPTIONAL ACCESSORIES


Non-lit Joiner

SJ QuickShip
Straight Line Joiner
(Optional 40' rolling lens)







+J QuickShip
" " Joiner




TJ QuickShip
"T" Joiner




YJ QuickShip
"Y" Joiner



LJ QuickShip
"L" Joiner



VJ Make to Order
"V" Joiner *



Mounting & Optional Function

SMK QuickShip
Surface Mounting Kits



EME QuickShip
Emergency Function
(Only external 8w or 25w LED emergency driver with standard indicator available and need field-installed.)




CUSTOM LINE OR SHAPE ORDERING GUIDE

Example: HZES-S-S08-WH-D10


\- -

SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET)	Finish	0-10V Dim
HZES-S-C__ Individual 6ft/ up to 8ft Continuous Run Section (Enter length in product code above, ex. C18) QuickShip	**WH** QuickShip White	**D10** QuickShip 110-277V AC Dims to 10% *Tested Dimmers: Lutron® Diva-Dvtv, Leviton® IP-710-DL.*
HZES-S-S__ Square Configuration (Enter side length A, ex: S18) QuickShip	**BL** QuickShip Black	
HZES-S-R__/__ Rectangular Configuration (Enter side lengths A and B, ex. R12/24) QuickShip	**CM** Make to Order Custom *	**D01** QuickShip 110-277V AC Dim to 1%
HZES-S-L__/__ L-Shaped Configuration (Enter side lengths A and B, ex. L12/24) QuickShip		
HZES-S-T__/__/__ T-Shaped Configuration (Enter side lengths A, B and C, ex. T02/02/04) QuickShip		
HZES-S-X __/__/__/__ Cross-Shaped Configuration (Enter side lengths A, B,C and D, ex. X02/02/02/02) QuickShip		
HZES-S-Y__/__/__ Y-Shaped Configuration (Enter side lengths A,B and C, ex. Y04/04/04) QuickShip		
HZES-S-H__ Hexagon-Shaped Configuration (Enter side lengths A, ex. H4)* Make to Order		

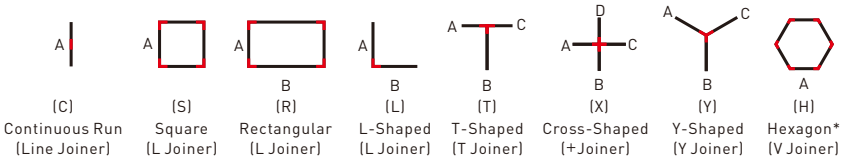

** Make to Order means additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.*
Damp rated for ambient operating temperature of -20°C to +40°C (-4° to+104°F)

DIMENSIONS

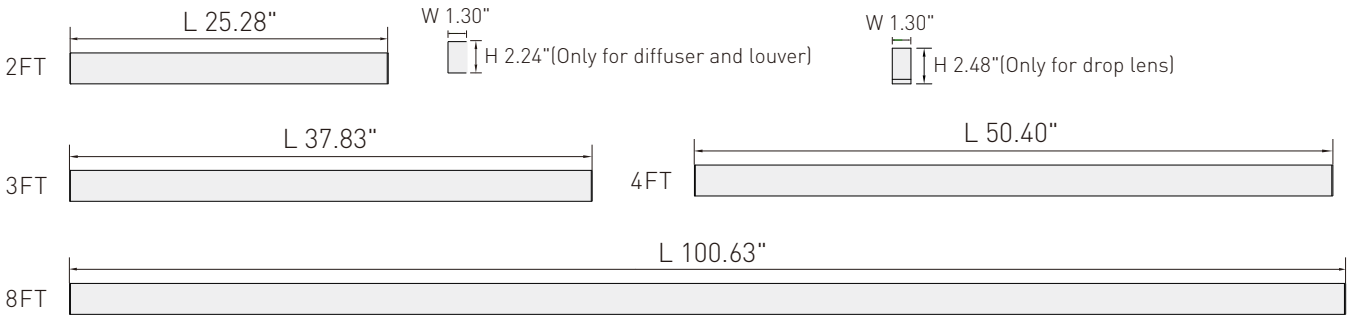

2026.10

Specifications subject to change without prior notice.
@2026 High5LED. ALL RIGHTS RESERVED

Job Name:

Type:


Part #:

Notes:

OPTIONAL FUNCTION

Emergency Option

We offer UL& CEC Listed LED emergency drivers. They could be factory installed or field installed. When AC power fails it, immediately switches to the emergency mode operating for lighting minimum 90 minutes. When AC power is restored it, automatically returns to the charging mode which meets critical life-safety lighting requirements.

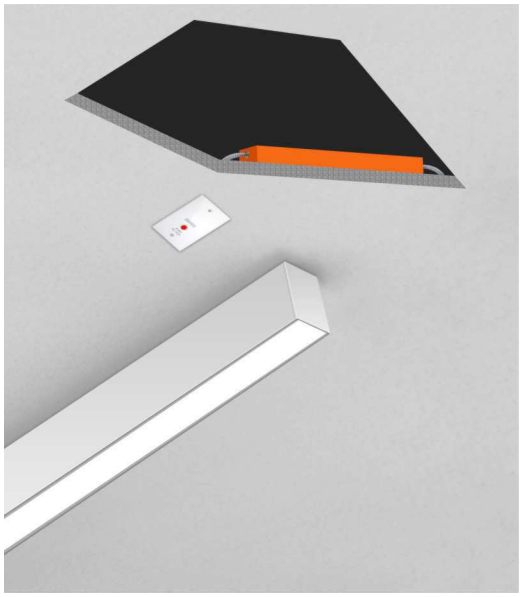

EME

Order Separated LED emergency driver

Optional 16w or 25w high voltage LED emergency driver can be provided if you need and do it wiring in field. For more info or spec sheet please visit our, website or contact sales.



Features:

- Field-installable (UL Listed for US & Canada).
- Energy-efficient charger (CEC Title 20 compliant).
- Premium battery backup – 90+ minutes runtime during outages.
- Backed by a 5-Year Limited Warranty.
- Supports most LED luminaires (Up to 200W).
- Universal input voltage (100–277V AC).
- Automatic self-diagnostic testing with monthly, semi-annual, and annual checkups.

Photometrics and Install Directions Available on Request

2026.10

Specifications subject to change without prior notice.
@2026 High5LED. ALL RIGHTS RESERVED