



HZE3

Spec-grade Surface Mount | Architectural LED Linear Lighting


HZE3 3.8" surface linear lighting is an integrated lighting solution that compliments the ceiling and entire space while providing comfortable general illumination. It is available in 2ft, 3ft, 4ft and 8ft. THREE mounting options in ONE housing the HZE3 offers numerous linear lighting options that complement our award-winning architectural lighting platform, while providing a consistent aesthetic.

Features:

- Three mounting options in ONE housing - 2', 3', 4' and 8'
- Seamless continuous runs or custom patterns with Illuminated corners
- CCT & wattage adjustable, up to 1100lm/ft
- Diffuser and regressed lens options
- Easy maintenance

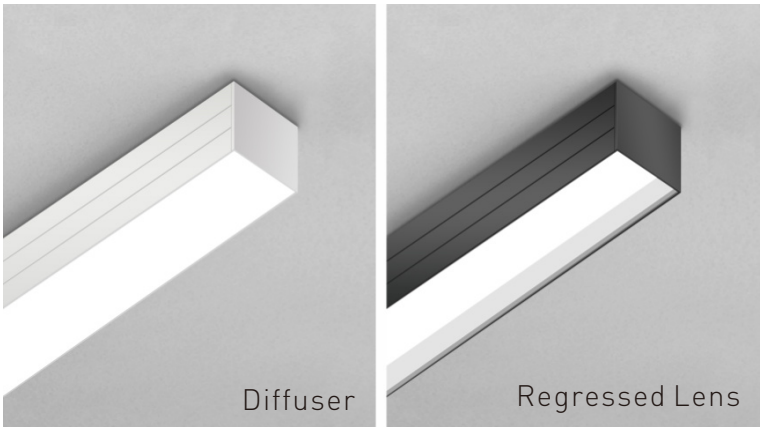

DIMENSIONS

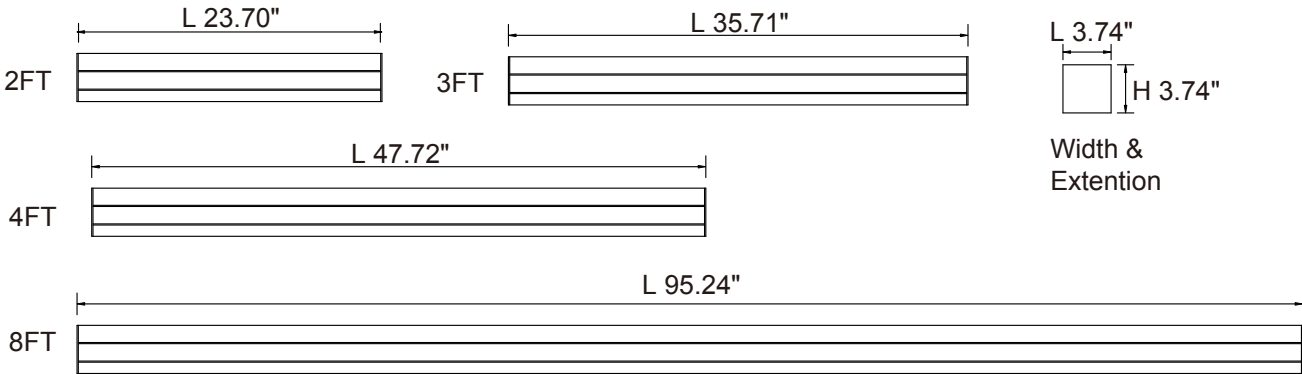

PERFORMANCE

Lens	Length	Wattage Selectable	100%DOWN		CCT Adjustable
			Efficacy	Lumen Output	
Diffuser	2'	20W/15W/10W	1100m/ft	Up to 2200LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 3300LM	
	4'	40W/30W/20W		Up to 4400LM	
	8'	80W/60W/40W		Up to 8800LM	
Regressed Lens	2'	20W/15W/10W	900lm/ft	Up to 1800LM	3000K/3500K/4000K
	3'	30W/23W/15W		Up to 2700LM	
	4'	40W/30W/20W		Up to 3600LM	
	8'	80W/60W/40W		Up to 7200LM	



Notes: Lumens are subject to maximum wattage,4000K with white finish only. Lumen output may vary ± 5% base on different CCT and wattage. Actual wattage may vary ± 5%.

PRODUCT ORDERING GUIDE







Example: HZE3-4W-WH-40W-D10-80TW-D-
DF (Surface)

Default Settings: Maximum wattage, 4000K and 100% down.

HZE3 - - - - **80** **TW** - **D** - **(Surface)**





Product Series	Length	Finish	Wattage	0-10V Dim	CRI	CCT	Lighting Distribution	Down Lens	Just to remark the mounting. Don't show in product label.
HZE3	2W QuickShip	WH QuickShip	20W QuickShip	D10 QuickShip	80 QuickShip	TW QuickShip	D QuickShip	DF QuickShip	
Linear	2 Feet Wide	White	20W/15W/10W Selectable for 2ft	110-277V AC Dims to 10%	80+ CRI (Standard)	CCT adjustable 3000K/3500K/ 4000K	100% Downlight	Diffuser	
	3W QuickShip	BL QuickShip	30W QuickShip	Tested Dimmers: Lutron Diva- Leviton P-710- DL	90 Make to Order			RL QuickShip	
	3 Feet Wide	Black	30W/23W/15W Selectable for 2ft		90+ CRI*			Regressed Lens (White Shade)	
	4W QuickShip	CM Make to Order	40W QuickShip	D01 Make to Order					
	4 Feet Wide	Custom *	40W/30W/20W Selectable for 2ft	110-277V AC Dim to 1%*					
	8W QuickShip		80W QuickShip						
	8 Feet Wide		80W/60W/40W Selectable for 2ft						

OPTIONAL ACCESSORIES

Lit Joiner	Mounting & Optional Function
SJ QuickShip Straight Line Joiner (Optional 40' rolling lens)   Line Joiner LJ QuickShip Lit "L" Joiner  "L" Joiner	SMK QuickShip Surface Mounting Kits  EMI QuickShip Emergency Function (Built-in 8W LED emergency driver and indicator before delivery, only for 4ft and 8ft lengths.)  EME QuickShip Emergency Function (Only external 8w or 25w LED emergency driver with standard indicator available and need field-installed.) 

CUSTOM LINE OR SHAPE ORDERING GUIDE

Example: HZEW-S-S08-WH-D10

SHAPE/LENGTH* (CHOOSE 1 & ENTER LENGTH IN FEET)	Finish	0-10V Dim
HZEW-S-C Individual 6ft/ up to 8ft Continuous Run Section (Enter length in product code above, ex. QuickShip	WH QuickShip	D10 QuickShip
HZEW-S-S C18) Square Configuration (Enter side length A, ex: S18) QuickShip	White	110-277V AC Dims to 10%
HZEW-S-R Rectangular Configuration (Enter side lengths A and B, ex. R12/24) QuickShip	BL QuickShip	Tested Dimmers: Lutron Leviton P-710- DL
HZEW-S-L L-Shaped Configuration (Enter side lengths A and B, ex. L12/24) QuickShip	Black	D01 Make to Order
	CM Make to Order	110-277V AC Dim to 1%*
	Custom *	
 (C) Continuous Run  (S) Square  (R) Rectangular  (L) L-Shaped		

Shape orientation Looking from the Ceiling down to the floor.

All corners of shape must be 90° or 120°, same plane. joiners and rolling lens will be included. FOR more complex shape, CONTACT OKT.

*Make to Order means additional cost and/or lead time on customized fixtures may apply. Some fixtures require an MOQ. Please contact your sales rep for more information.

Damp rated for ambient operating temperature of
-20°C to +40°C (-4° to +104°F)