

LSLEDCADXR

Chicago Approved Steel LED Emergency Lighting

STANDARD



ILLUMINATION

- Two, 6V 5.3W adjustable white LED lamp heads.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 10W standard on 20W models.

MOUNTING

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.


HOUSING

- Durable 20-gauge steel construction.
- Neutral white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- UL listed for damp locations (20° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

DIMENSIONS

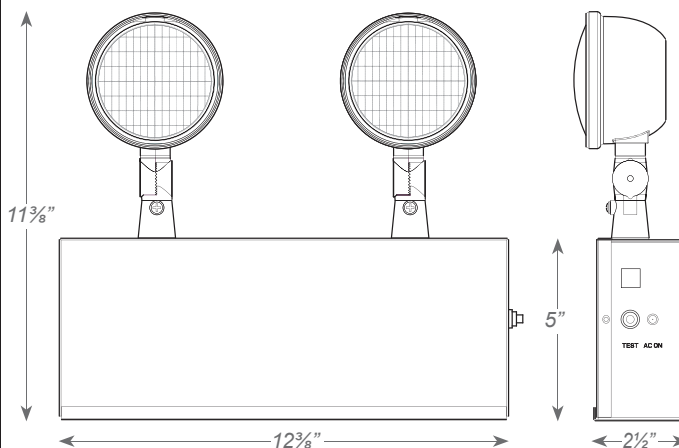

ORDERING INFORMATION

Sample Part Number: **LSLEDCADXR-10**

MODEL	HOUSING COLOR		WATTAGE	
LSLEDCADXR	BLANK	White	10	10 Watts
	B	Black	20	20 Watts (10 watt remote)



Job Name: _____

Type: _____

Part #: _____

Notes: _____

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LSLEDCADXR	8.4	9.4	0.08A	0.04A
LSLEDCADXR-RC	8.7	10.0	0.09A	0.05A

	MAXIMUM WATTAGE ALLOWED
LSLEDCADXR-10	10

REMOTE LAMP CAPABILITY

Reference remote lamp head specification sheets for complete catalog number ordering information.

REMOTE HEAD FAMILY	TOTAL WATTAGE
SRHLED-1	5.3
RH16-1	5.0
RH16-2	10.0
RHR-1 (5.4 watt)	5.4
RHR-1 (7.0 watt)	7.0
RHR-1 (9.0 watt)	9.0
RH-1 (5.4 watt)	5.4
RH-1 (7.0 watt)	7.0
RH-1 (9.0 watt)	9.0
RH1-WP (5.4 watt)	5.4
RH1-WP (7.2 watt)	7.2
RH1-WP (9.0 watt)	9.0
RHLED-1-16-MV	3.3
RHLED-2-16-MV	6.6

NOTE: Voltages of the remote lamp head must match the voltage of the individual unit. Reference individual remote lamp head specification sheets for voltage compatibility.