

Job Name:

Type:

Part #:

Notes:

LSCEM

ALL LED EXIT & EMERGENCY COMBO

STANDARD





ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- 1.5 watt (3 LEDs x 0.50W) per head.
- Unique all-inclusive lamp, reflector and lens assembly.
- Adjustable LED lamp heads provides optimal center-tocenter spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Remote capacity option available.

MOUNTING

EZ-snap mounting canopy included for top or end mount.
Universal K/O pattern on back plate for wall mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.



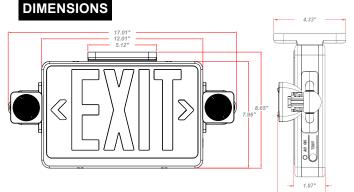

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- NH: No lamp head attached to the unit enabling it to be used as remote capable exit sign.

SPACING

| | Mounting | 3FT Width Egress Path | | | | | |
|--------|------------------|------------------------|----------------------------|--|--|--|--|
| PART# | Height (FT) | Single Fixture (ft) | Fixture To Fixture (ft) | | | | |
| | 7.5 (Wall Mount) | 26 | 30 | | | | |
| LSCEM | 10 (Wall Mount) | 28 | 29 | | | | |
| LUULIN | 12 (Wall Mount) | 22 | 24 | | | | |
| | 15 (Wall Mount) | 20 | 23 | | | | |

ORDERING INFORMATION

Sample Part Number: LSCEMGWRC

| ¹ SDT & NH options are not available together. | MODEL | No. of FACES | | LETTER COLOR | | HOUSING COLOR | | OPTIONS | |
|---|--------|--|---|--------------|---|---------------|-----|-------------------------------|--|
| | LSECEM | Universal Single/ Double Face Standard | R | Red | W | White | RC | Remote Capacity | |
| | | | G | Green | В | Black | NH | No Lamp Heads ¹ | |
| | | | | | | | SDT | Self-diagnostics ¹ | |
| | | | | | | | | | |

Specifications subject to change without prior notice. @2022 LSL 24/7. ALL RIGHTS RESERVED