

Job Name: \_\_\_\_\_


Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSHLWLEZU

## STANDARD

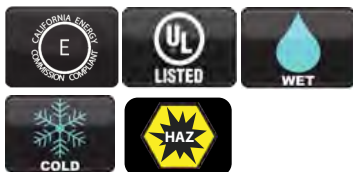

## OPTIONAL



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

## ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.

## HOUSING

- Housing is reinforced polycarbonate construction in Gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.


## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- Rated for Class 1, Division 2, Groups A, B, C, & D.
- Certified to CEC under Title 20 Regulations.
- UL listed for wet locations (-4°F {20°C} – 122°F {50°C}).

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120	277	120V	277V
LSHLWLEZU-RED/GREEN/EM/SDT	3.0	3.0	0.03	0.02

## DIMENSIONS

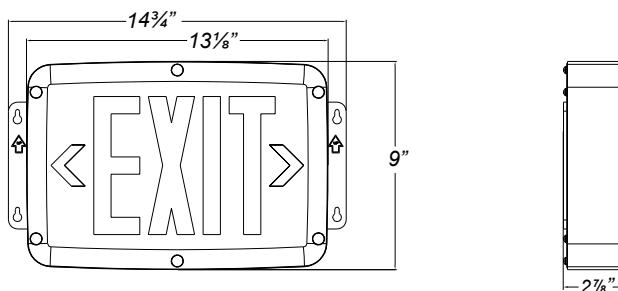

Sample Part Number: **LSHLWLEZU1RGEM**

## ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LSHLWLEZU	1	Single	R Red	(blank) AC-Only	SDT Self-Diagnostics <sup>1</sup>
	2	Double	G Green	EM NiCd Battery	TP Tamper-Proof

<sup>1</sup> Available in EM units only.