

# LSLEDEXC LED EXIT EMERGENCY COMBO

## FEATURES

- Energy-efficient LED technology in EXIT sign
- EZ snap-out chevron directional indicators
- Combines an EXIT sign & emergency light into one low-profile unit
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

## ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125 watt) per head
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Ultra bright, energy efficient, long-lasting Red or Green LED (exit sign illumination)

## ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V, 4.5Ah, sealed lead acid, maintenance-free, rechargeable battery
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

	Supply Voltage	Max. Watts	Max. Amps
Red	120V/277V	3.8w	0.040A
Green	120V/277V	3.2w	0.03A
Red-RC	120V/277V	3.6w	0.033A
Green-RC	120V/277V	3.2w	0.03A
Red-SDT	120V/277V	5.7w	0.046A
Green-SDT	120V/277V	5.4w	0.045A
Red-RCSDT	120V/277V	5.6w	0.045A
Green-RCSDT	120V/277V	5.4w	0.044A

## MOUNTING

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy.



SALIDA faceplates also available

## OPTIONS

- SDT: Self-Diagnostic (option SDT) continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes
- Using the optional internal heater (-HTR) enables the unit to be used in cold environments (contact customer service for more information).

## HOUSING


- Injection-molded, engineering-grade, V-O flame retardant, high-impact thermoplastic in white or black finish

## WARRANTY & LISTINGS

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.



## DIMENSIONS

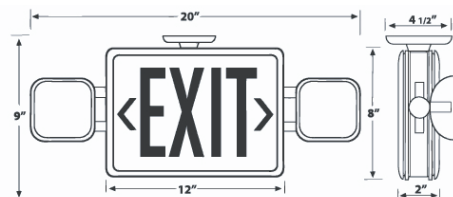

Spacing Chart

	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"	13"	14"	15"
1"	0.24	0.31	0.40	0.43	0.44	0.50	0.58	1.01	0.83	0.91	0.94	0.97	0.97	0.97	0.96
2"	0.25	0.42	0.59	0.79	0.87	0.82	0.94	1.09	1.09	1.09	1.09	1.09	1.09	1.09	1.09
3"	0.36	0.67	0.90	1.02	1.05	1.14	1.00	1.30	1.40	1.01	0.92	0.92	0.92	0.92	0.92
4"	0.5	0.69	0.86	1.00	1.04	1.17	0.96	1.06	1.14	1.00	1.00	0.99	0.99	0.99	0.99
5"	0.48	0.69	0.78	0.84	1.03	1.05	0.8	0.78	1	0.87	0.63	0.5	0.35	0.3	0.24
6"	0.43	0.48	0.69	0.72	0.79	0.75	0.59	0.54	0.6	0.54	0.42	0.41	0.28	0.2	0.15

Meets NFPA 101 1c requirements using 10" spacing on T path of egress

## ORDERING INFORMATION

Sample Part Number: **LSLEDEXC-U2-R-W-SDT**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LSLEDEXC	U2 - UNIVERSAL SINGLE/DOUBLE	R - RED G - GREEN	W - WHITE B - BLACK	BLANK - EM (STANDARD)	SDT - Self Diagnostics RC - Remote Capable (22W Total) KR9 - 9 W Krypton Lamps (RC Only) KR5 - 5.4 W Krypton Lamps HTR - Internal Heater USA - Assembled in the USA