

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSLEDMWL

## WET LOCATION REMOTE CAPABLE LED EMERGENCY UNIT

STANDARD



### ILLUMINATION

- Sealed and gasketed weather proof lamp heads with high performance chrome-plated metallized reflector and tempered glass lenses for optimal light distribution.
- Long lasting efficient ultra bright white LED lamp heads.
- 1.875W (15 LEDs x 0.125) per head.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C.

### MOUNTING

- External mounting brackets for simplified wall mounting.

### HOUSING


- Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish.
- Sealed and gasketed housing with hinged cover.
- Sealed test switch.



### LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing.
- Remote capacity of 3.7 watt standard in operating temperatures of 0° C – 50° C."
- Battery pro- rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C ).

### DIMENSIONS

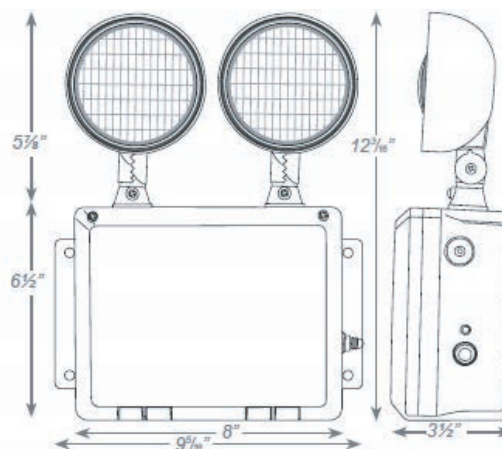

### ORDERING INFORMATION

Sample Part Number: **LSLEDMWL**

MODEL	HOUSING COLOR
LSLEDMWL	Blank - Gray B - Black

Special voltage options available.  
Check with your Lighting Representative.