



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSMHD

REMOTE CAPABLE INCANDESCENT EMERGENCY UNIT

STANDARD | OPTIONAL



ILLUMINATION

- Adjustable, glare-free PAR-Type lamp heads with 7.2W (on 6V models) and 9/12W (on 12V models) incandescent lamps.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact thermoplastic construction.




OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for dry locations (25°C).

DIMENSIONS

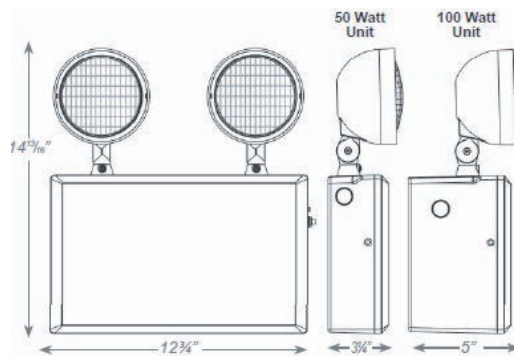

ORDERING INFORMATION

Sample Part Number: **LSMHD**

MODEL	VOLTAGE	CAPACITY	OPTIONS
LSMHD	6 - 6 Volts 12 - 12 Volts	5 - 50 Watt 10 - 100 Watt	HTR - Internal Heater ¹ 20SB 12V20W Sealed Beam Halogen ² USA - Assembled in USA

Special voltage options available.
Check with your Lighting Representative.
¹ Available with 50W units only.
² Available with 12V units only.