

Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSRHLED

LED OUTDOOR POLYCARBONATE /DIE-CAST REMOTE HEAD

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0 watt (8 LEDs x 0.125 watt) per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Optional high lumen heads are 1.5 watts (12 LEDs x 0.125 watt per head) and provide increased center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING


- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING

- Available in both engineering grade, high-impact resistant polycarbonate or premium grade die-cast aluminum housing.
- Sealed and gasketed in standard gray or black finish.



DIMENSIONS

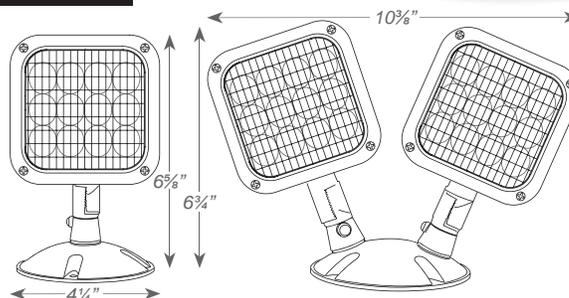

WARRANTY / LISTING

- Five year warranty.
- UL Listed with approved Best Lighting Products.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

| Model | No. of Heads | | Options | Housing | | Voltage | | Finish | | Lamp Type | |
|---------|--------------|-------------|---|---------|---------------|---------|---|---------|------|--------------|-----------|
| LSRHLED | 1 | Single Head | (blank) For Standard Non-Self-Diagnostic Fixtures | PWP | Polycarbonate | MV | For Use With 3.6V, 6V, 9.6V & 12V DC Power Source | (blank) | Gray | (blank) | 8 LEDs 1W |
| | 2 | Double Head | SDT For Use With Fixtures With A Self-Diagnostic Option | WP | Die-Cast | B | | Black | HL | 12 LEDs 1.5W | |

¹ Wattage rating stated per head.

Contact Factory for Fixture Compatibility List