



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSTX- Thin Thermoplastic Exit Sign

STANDARD



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out chevron directional indicators.
- Available specifically in single or double face only.

## LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

## DIMENSIONS

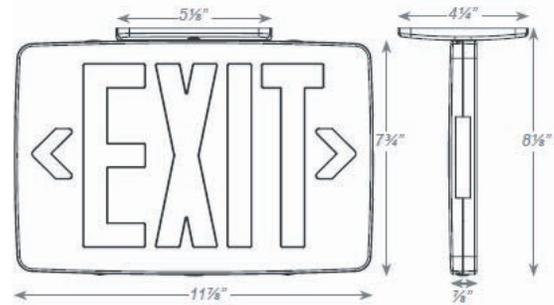

## ORDERING INFORMATION

Sample Part Number: **LSTX**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
LSTX	3 - Universal Single/Double Face	R - Red G - Green	W - White B - Black	Blank - AC Only EM - Battery Backup