



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSWLCEM

Low-profile Wet location Exit & Emergency Combo

ILLUMINATION:

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0W (1 LEDs x 1.0 watt) per head.
- Adjustable LED lamp heads provide up to 18-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL:

- Dual 120/277 voltage.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, Off-check battery).
- 3.6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

HOUSING:

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

MOUNTING :

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.

OPTIONS:


- CW: Optional high capacity battery for extreme cold temperature applications (-20°C – 50°C).
- RC: Remote capacity of up to 2.0 watts.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EWLCEM	1.1	1.1	0.12	0.12



DIMENSIONS

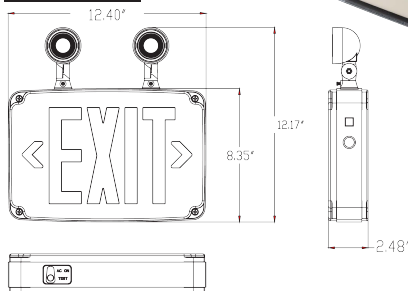

WARRANTY and LISTINGS:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations. hardware helps prevent unauthorized access to the unit.

STANDARD



OPTIONAL



Sample Part Number: **LSWLCEM1RGW**

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
LSWLCEM	1 Single Face	RG Red/Green (Field-selectable)	W White	CW Cold Weather ¹
	2 Double Face		B Black	RC Remote Capacity ¹
	(blank) Universal Single/Double Face		G Gray (with white faceplate)	TP Tamper Proof Screws

Note:
¹ Not available together

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY	
			RHLED	MRHLED
LSWLEM-RC	3.6V	2.0W	x	x