

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSWLEZXTEU

## Compact Wet Location Polycarbonate Exit Sign

STANDARD

OPTIONAL



### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

### ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


### HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

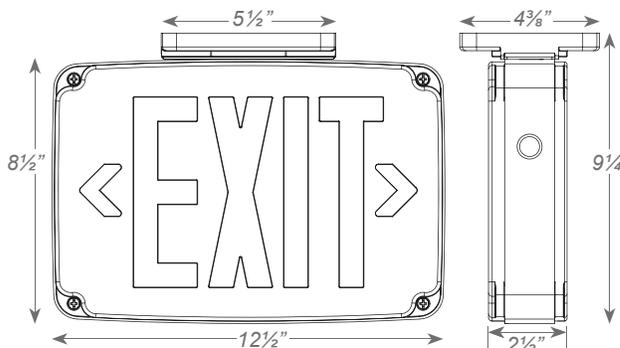

### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

### ORDERING INFORMATION

Sample Part Number: LSWLEZXTEU1RWEM-CW

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LSWLEZXTEU	1 Single Face	R Red	W White (with white faceplate)	(blank) AC-Only	SDT Self-Diagnostics <sup>1</sup>
	2 Double Face	G Green	B Black (with black faceplate)	EM-CW Battery Backup (Cold Weather Standard)	2C Dual Circuit Operation <sup>2</sup>
			G Gray (with white faceplate)		TP Tamper-Proof
					CUSTOM Custom Wording

<sup>1</sup> Available only with EM units.

<sup>2</sup> Available only with AC units.



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LSWLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
LSWLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
LSWLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011