



Job Name: \_\_\_\_\_


Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSXLPDC THIN DIE-CAST LED EXIT SIGN

STANDARD



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


## HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

## LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

## DIMENSIONS

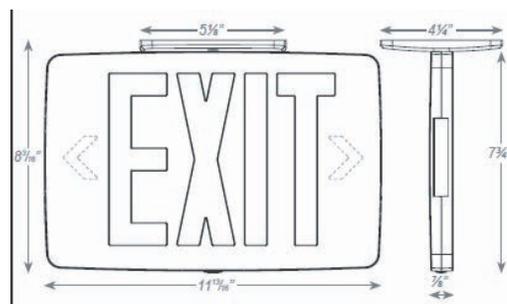

## ORDERING INFORMATION

Sample Part Number: **LSXLPDC**

| MODEL   | # OF FACES                         | LETTER COLOR         | HOUSING COLOR                          | BATTERY                                |
|---------|------------------------------------|----------------------|--|--|
| LSXLPDC | 1 - Single Face<br>2 - Double Face | R - Red<br>G - Green | W - White<br>B - Black<br>A - Aluminum | Blank - AC Only<br>EM - Battery Backup |