



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSXP

ALL LED EXIT & EMERGENCY LIGHTPIPE THERMOPLASTIC COMBO

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5 watt (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "Light Pipe" lens for optimal light distribution.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Remote capacity of 3.0 watts standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED Light Pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snap-out Chevron directional indicators.

ORDERING INFORMATION

Special voltage & SALIDA face plate options available. Check with your LSL 24/7 Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS			
LSXP	2	R Red G Green	W White B Black	RC	Remote Capable (Standard)	SDT CUSTOM	Self-Diagnostics Custom Wording

DIMENSIONS

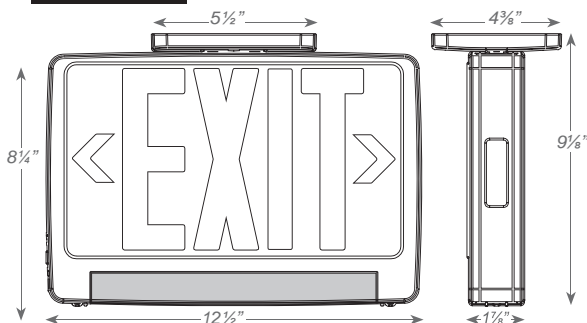

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Patent No:
US, 8,024,880 B2

Sample Part Number: LSXP2RWRC