



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LSXRU-RC

## Remote Capable LED Exit Sign

STANDARD

OPTIONAL



### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

### ELECTRICAL

- Dual 120/277 voltage.
- Offers 11W of remote capacity standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and remote lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.


### OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C – 50°C) applications.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets CSA C22.2 No. 141-02 requirements for unit equipment.
- UL Listed for damp locations (20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

### DIMENSIONS

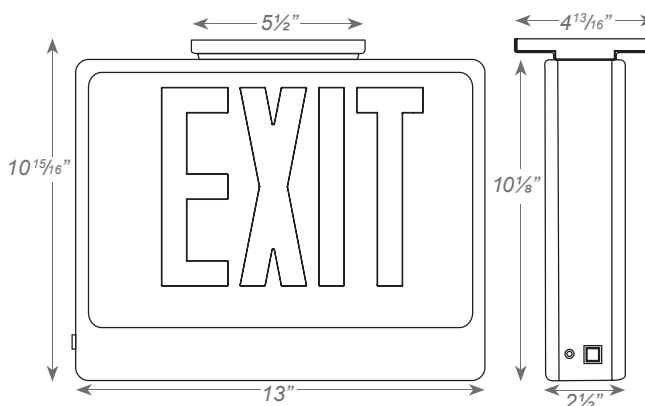

Sample Part Number: LSEXRU2RWEMRC

### ORDERING INFORMATION

| MODEL | No. of FACES                            | LETTER COLOR | HOUSING COLOR | BATTERY              | OPTIONS                       |
|-------|---|--------------|---------------|----------------------|-------------------------------|
| LSXRU | 2<br>Universal<br>Single/Double<br>Face | R Red        | W White       | EM Battery<br>Backup | RC Remote Capable<br>Standard |
|       |   | G Green      | B Black       |                      |                               |

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

**ELECTRICAL INFORMATION**

| CATALOG NUMBER | INPUT WATTS (W) |      | INPUT AMPS (A) |      |
|----------------|-----------------|------|----------------|------|
|                | 120V            | 277V | 120V           | 277V |
| LSXRU-RC/RC    | 10              | 10   | 0.10           | 0.05 |

**REMOTE LAMP COMPATIBILITY**

| MODEL NUMBER | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY |       |         |      |     |    |     |     |     |     |     |        |
|--------------|---------|-----------------|-------------------------------|-------|---------|------|-----|----|-----|-----|-----|-----|-----|--------|
|              |         |                 | MRHLED                        | RHLED | RH16LED | RH16 |     | RH |     | RHR |     | SRH |     | SRHLED |
|              |         |                 |                               | MV    |         | 6V   | 12V | 6V | 12V | 6V  | 12V | 6V  | 12V |        |
| LSXRU-RC/RC  | 6V      | 11W             |                               | X     | X       | X    |     | X  |     | X   |     | X   |     | X      |