



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LSXWL

WET LOCATION LED EXIT SIGN

STANDARD			OPTIONAL	

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap
- Charge rate/power "ON" LED indicator light and push-to-test-switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting hardware provided for back surface wall mount.

HOUSING


- 5VA fl ame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade Silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.

OPTIONS

- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.



DIMENSIONS

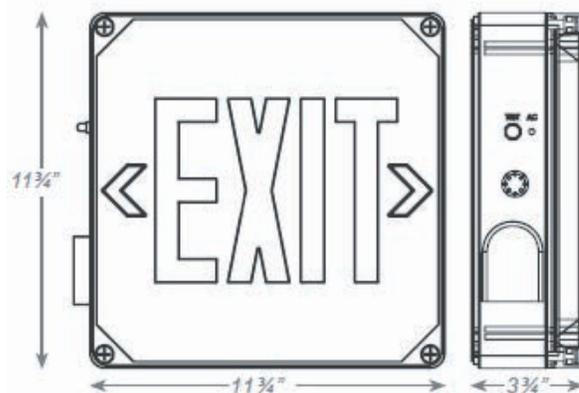

LISTINGS AND WARRANTIES

- Five year warranty on all electronics and housing. Batteries pro rated for five years.
- UL Listed for wet locations (10°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

Sample Part Number: **LSXWL**

MODEL	# OF FACES	LETTER COLOR	BATTERY	OPTIONS
LSXWL	1 - Single Face	R - Red G - Green	Blank - AC Only EM - Battery Backup	HTR - Internal Heater ¹ USA - Assembled in USA

Special voltage & SALIDA face plate options available. Check with your LSL 24/7 Rep-representative.
¹ Available only with EM units.