

Job Name: _____
 Type: _____
 Part #: _____
 Notes: _____

COBRA MICRO

SPECIFICATIONS

The Cobra Micro maintains efficient AC Emergency Power to operate all emergency lighting fixtures at "full-light" output after the transfer is complete, providing superior dependability and security to commercial/industrial environments in a small footprint.

POWER RATING

- 75 Watts - 375 Watts single phase output unit uses the latest

INPUT

- 120V or 277 VAC input 60Hz

OUTPUT

- 120V 77 VAC. Stand-by design is ≥99% efficient

BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE ATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

CODES

- UL 924, UL 1778, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

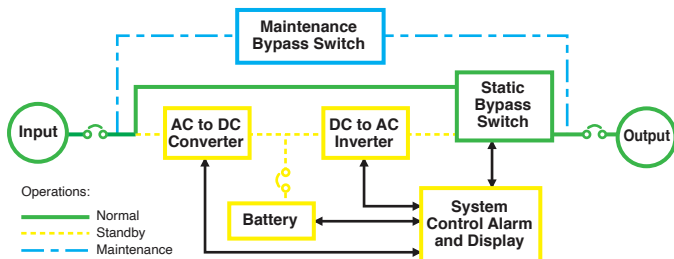

75 W - 375 W LED
 Single Phase LED
 Compatible Stand-By
 Emergency Lighting
 and Power Systems

PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and The Watchdog© software to protect system performance and reliability
- Transfer in 16msec - 60msec

DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and The Watchdog© software provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

CABINET

- Space saving small footprint
- Modular design enables flexible installation

INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

SPECIAL APPLICATIONS

- LSL 24/7 offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/ or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with MFG Phone Assistance
- 5-Year powertrain warranty
- Maintenance contracts available



Job Name: _____
 Type: _____
 Part #: _____
 Notes: _____

Micro Series	Power Rating	UPS			Weight (lbs)	British Thermal Unit's	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		Cabinet Dimensions						Input	Output		
CMIC	VA/W	W	H	D			Sealed, Maintenance free (AGM) lead calcium	<i>Select</i>	<i>Select</i>	Input and output circuit breakers standard	UL924 UL1778 NFFPA 101 NFFPA 70 NEC
	75	17.5"	22.5"	8"	45	2.55		120	120		
	125	17.5"	22.5"	8"	48	4.25		or	or		
	200	17.5"	22.5"	8"	54	6.8		277	277		
	375	17.5"	22.5"	8"	66	10.2					

The Cobra Micro provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation ...”simplicity”...connect the Micro to the emergency circuit(s) and everything is backed up...”reliability”...during a power outage. All lighting connected to the Micro will simply continue to operate at “**full light output**” once the transfer is complete. The Watchdog© software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time.

We sincerely hope you never experience a real emergency, but if you do, you deserve the **security, safety and peace of mind** that the Cobra Micro from **LSL 24/7** ensures.

ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

CMIC - 150 - 120/120

Description of example:

(150 Watt, 120 Voltage In, 120 Voltage Out)

