

Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Part #: \_\_\_\_\_  
 Notes: \_\_\_\_\_

# LSXCCD

HAZARDOUS | NEMA 4X  
 VANDAL RESISTANT | BAA



## Specifications: Internal


The LSXCCD COMBO has a standard 120/277V input. The solid state, high efficiency, dual rate charger provides precise float voltage control and incorporates a low voltage disconnect for optimum protection. High performance red or green LEDs properly illuminate the face. Fuse protection is standard.

## Specifications: External

The durable NEMA 4X fiberglass enclosure is corrosion and vandal resistant. The housing is fully gasketed and is supplied standard in an industrial gray finish. The LSXCCD COMBO can be surface mounted on a wall. Magnetic test switch and LED status indicator are standard.



dimensions (in,mm.)

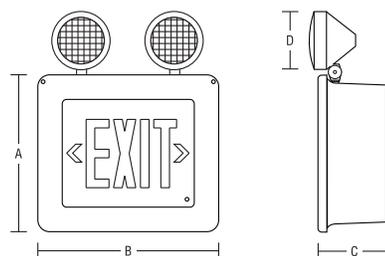

Series	A	B	C	D
LSXCCD-C	13.5"	15.5"	6.25"	5.25"
	343mm	394mm	159mm	140mm

## Ordering Logic

Series	Operation	Pb-A (Capacity)	Ni-Cd <sup>1</sup> (Capacity)	LED	Face No.	Chevrons	Mounting	Heads <sup>2</sup>	Lamps	Options
LSXCCD	6 (6V)	36 (6V, 12V)	42 (6V, 12V)	LR (red)	1 (single)	U (universal)	W (wall)	4LRWP	See lamps	AT (autotest)
	12 (12V)	60 (6V, 12V)	54 (6V)	LG (green)						NC <sup>3</sup> (nickel-cadmium battery)
		72 (6V)	90 (6V, 12V)							TD <sup>4</sup> (time delay- specify 5, 10, 20 mins)
		100 (6V)	130 (12V)							TP (tamper proof screws)
		120 (6V, 12V)								AM (ammeter)
	140 (12V)				VM (voltmeter)					
									SW (special wording- specify)	
										FAI <sup>5</sup> (fire alarm interface)
										SMH (side mount heads)
										TC (teflon coating)
										WG (wireguard)

NOTE 1: Nickel-cadmium. Must select NC from options when selecting Ni-Cd.  
 NOTE 2: Only PAR-36 heads available  
 NOTE 3: NC (select wattage/voltage from Ni-Cd column).

NOTE 4: Must specify at time of order, 10 min standard.  
 NOTE 5: Specify type- open/closed dry contact.

EXAMPLE: LSXCCD-C636LG1UW2LRWP8WH-VM  
 DESCRIPTION: LSXCCD combo, 6V 36W, green LED, single face with universal chevrons, wall mount, two 8W halogen lamps, voltmeter



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## Emergency Heads

As standard, the LSXCCD COMBO is supplied with two (2) top mounted, weatherproof PAR36 style emergency heads. Constructed of high impact thermoplastic and finished in a neutral gray finish. The emergency head design features a locking collar that securely holds the lens in place and facilitates quick re-lamping.

## Specifications: Electrical

**BATTERY:** The LSXCCD EXIT is configured with high output, high efficiency red or green LEDs that consume less than 2W. Configured with 120/277V input. Magnetic test switch and monitor LED. The LSXCCD COMBO is designed with maintenance free, sealed lead acid batteries, providing a minimum emergency duration of 90 minutes. Optional nickel cadmium batteries are available. Recharge time for the batteries is forty-eight (48) hours. Operating temperature 10°C up to 40°C.

**CIRCUIT:** The LSXCCD COMBO utilizes a high-efficiency two stage charger providing precise float voltage control with low voltage disconnect protection. All components used in the circuitry are temperature compensated. The charger also has brownout and short circuit protection. Charger status is easily determined via a dual diagnostic LED display which indicates AC/ON and High Charge. A magnetic test switch allows maintenance personnel to quickly determine the operational status of the unit and lamp load, (magnet included).

## Specifications: Mechanical

The LSXCCD COMBO series housing is constructed from durable, corrosion resistant fiberglass. The NEMA 4X housing is fully gasketed for harsh and hazardous locations. The front access panel/door is hinged for trouble-free installation and maintenance. The LSXCCD COMBO features a stainless steel breather valve that provides efficient ventilation. Remote lamp loads are connected to the emergency power supply with sturdy terminal connectors. These connectors allow for a large gauge of wire to be used increasing the flexibility of installation.

The LSXCCD has been designed to perform in applications where the environment would punish any standard unit. The entire internal cavity of the sign is protected from moisture ingress by an extremely resilient gasket. The gasketing always holds its original form and has “memory retention” so that it effectively and consistently protects the ROBUSTO from moisture.

## Warranty

The LSXCCD COMBO comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

## Hazardous Approvals

The LSXCCD series is approved for use in Class 1, Division 2, Groups A, B, C and D: T2B area classification. In addition, the Robusto is also suitable for Class I, Zone 2, IIA, IIB & IIC: T1 & T2 area classification.

## Autotest

The LSXCCD Autotest feature automatically performs a 5 minute discharge test monthly. Every 6 months, two 90 minute discharge tests are performed 24 hours apart. This tests both the battery capacity and recharge capability. The status of the LSXCCD COMBO is communicated clearly with a single, multi-color LED indicator.

## Lamp Selection: (ONLY PAR36 STYLE HEADS AVAILABLE)

	6V	12V
Composite Tungsten	9, 18W	9, 18W
Sealed Beam LED (LEDSB)	N/A	6W

## Model Rating Guide

Model	Voltage	Wattage			
		90min	120min	180min	240min
LSXCCD-C-6-36	6	36	27	18	13
LSXCCD-C-6-42	6	42	31	21	15
LSXCCD-C-6-54	6	54	40	27	20
LSXCCD-C-6-60	6	60	45	30	22
LSXCCD-C-6-72	6	72	54	36	27
LSXCCD-C-6-90	6	90	67	45	33
LSXCCD-C-6-100	6	100	75	50	25
LSXCCD-C-6-120	6	120	90	60	45
LSXCCD-C-12-36	12	36	27	18	13
LSXCCD-C-12-42	12	42	31	21	15
LSXCCD-C-12-60	12	60	45	30	22
LSXCCD-C-12-90	12	90	67	45	33
LSXCCD-C-12-120	12	120	90	60	45
LSXCCD-C-12-130	12	130	97	65	48
LSXCCD-C-12-140	12	140	105	70	52