Job Name:

Type:

Part #:

Notes:

LSXSTEU

STEEL LED EXIT SIGN

ILLUMINATION: Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL:
• Dual 120/277 voltage.
• Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
• 4.8V long life maintenance-free, rechargeable NiCd battery.
• Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
• Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING:
• Mounting canopy included for top or end mount.
• Universal K/O pattern on back plate for wall mount.

HOUSING:
• Durable, powder-coated 20-gauge steel construction in white or black finish.
• Unique design allows double face conversion in the field.
• Field selectable steel knockout chevron directional indicators.

OPTIONS: SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

LISTINGS AND WARRANTIES:
• Five year warranty on all electronics and housing. Battery pro- rated for five years.
• Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
• UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

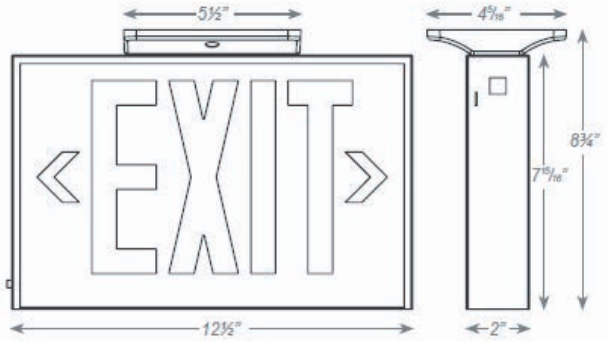

ORDERING INFORMATION

Sample Part Number: ***LSXST***

Special voltage options available. Check with your Lighting Representative.

1 Available only with EM units.

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
LSXSTEU	*1 - Single Face* *2 - Universal Single/ Double Face*	*R - Red* *G - Green*	*W - White* *B - Black*	*Blank - AC Only* *EM - Battery Backup*	*SDT - Self-Diagnostics* [1]

2025.03

Specifications subject to change without prior notice.

@2025 LSL 24/7. ALL RIGHTS RESERVED